
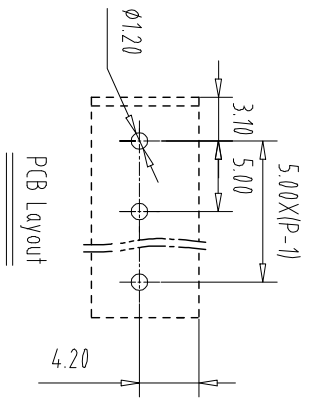
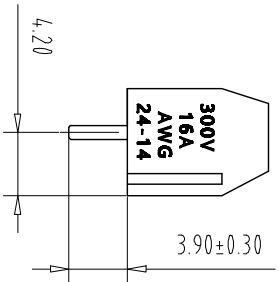
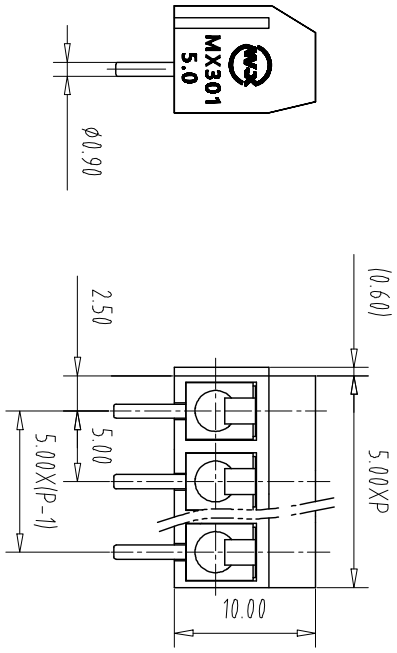


注：本板为禁止传输、复制、编辑文件，以及用其内容进行交流

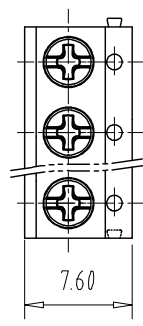

REV	ECN NO.	CONTENT	CHK	DATE

- NOTES1:
 UL Standard
 1.Rating voltage/current: 300V//16A
 2.withstanding voltage: AC2000V//1Min
 3.Torque value: M2.5, 3.54LbIn
 4.Wire range: 24~14AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

- NOTES2:
 1.Housing: PA66(UL94V-0)
 2.Solder Pin: Copper alloy(Sn Plated)
 3.Spring: Stainless Steel
 4.Screw: Steel(M2.5,Zn Plated)

- NOTES3:
 1.Pitch: 5.0mm Poles: 02-22P
 2.Stripping length: 6-7mm
 3.Operating temperature: -40℃~+105℃
 4.RoHS Compliance

How to order
 MX301 - 50 - XXP - XXXX - XX - X - X
 产品型号 间距 颜色 数量 01:常规颜色 A-Z其他定制
 颜色: 灰色:GY 橙色:OE 02-99: 0:Y一字螺丝
 蓝色:BU 红色:RD 定制颜色 1:S十字螺丝
 黑色:BK 透明色:TT Cu:铜方块 2:P:平头十字螺丝
 绿色:GN 黄色:YW Fe:铁方块
 透明色:TT 白色:WE

Pitch	Range	In mm	Nominal Dimension	Range	In mm	Over	Range	In mm	Over	Range	In mm	Over	Range	In mm	Over	Range	In mm
TO	6	10	TO	30	60	TO	100	TO	150	TO	150	TO	150	TO	150	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±2°	±2°	±2°	±2°	±2°	±2°	±2°	±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	DATE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD				NAME	MX301-5.0-XXP
MAIXU 慈溪市迈旭电子有限公司				DWGNO.	