
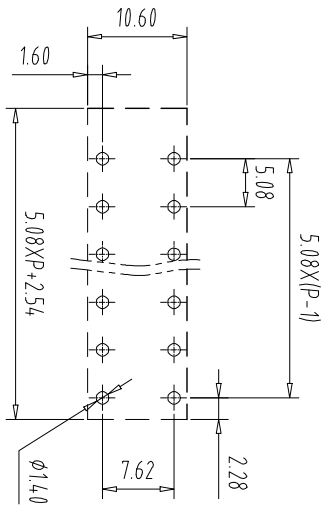

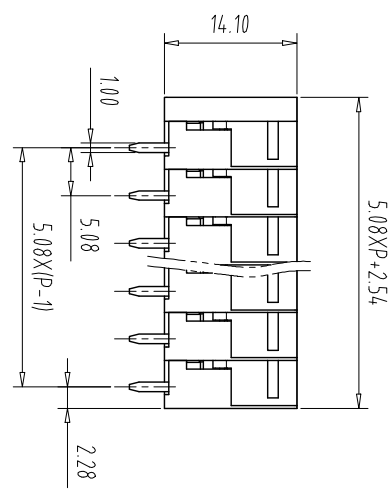



注：本板为禁止运输、复制、编辑文件，以及用其内容进行交流

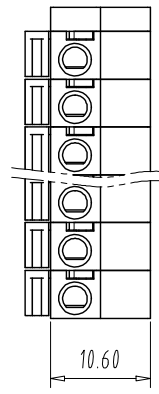

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	10A	/	10A
Rated Voltage	300V	/	300V

2. Wire range: 22~16AWG
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	/	4KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	15A	/

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Pin header: Copper alloy (Sn Plated)
- 4.Spring: Stainless Steel
- 5.Button: POM

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 10-11mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX14ZY - 508 - XXP - XXXX - X - X - X
 产品型号 间距 颜色: 数量
 灰色:GY 橙色:OE 01:带刷颜色
 蓝色:BU 红色:RD 02-99: 定制颜色
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 透绿色:TT 白色:WE

A-Z其他定制
 0-Y一字螺丝
 1-S十字螺丝
 2-P.S平头十字螺丝
 CU:铜方块
 FE:铁方块

Pitch Range	In mm	Nominal Dimension	In mm	Range
Over 6	TO	Over 10	TO	Over 30
Over 10	TO	Over 24	TO	Over 60
Over 24	TO	Over 30	TO	Over 100
Over 30	TO	Over 60	TO	Over 150
Over 60	TO	Over 100	TO	Over 150

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	NAME		
CIXI MAXXU ELECTRONICS CO.,LTD 慈溪市迈旭电子有限公司			DWGNO.		