

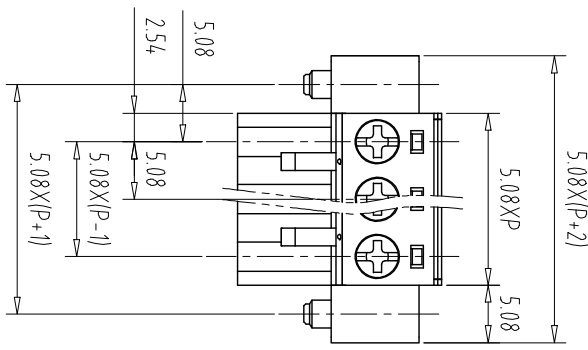



注：本板为禁止运输、复制、编辑文件，以及利用其内容建设交流

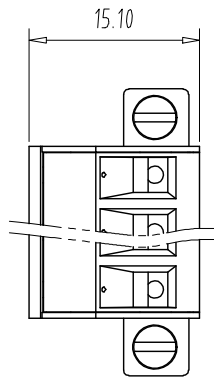

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

1. Torque value: M2.5, 3.54Lb/in
 2. Torque value: M2.5, 3.54Lb/in
 3. Wire range: 28~12AWG
 IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(kV)	/	4.0kV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	15A	/


2. Torque value: M2.5, 0.4Nm
 3. wire range: 0.2~2.5mm²

- NOTES2:
 1.Housing: PA66 (UL94V-0)
 2.Cover: PA66 (UL94V-0)
 3.Cage: Brass (Ni Plated)
 4.Clamp: Copper alloy (Ni Plated)
 5.Screw1: Steel (M2.5,Zn Plated)
 6.Screw2: Steel (M2.5,Zn Plated)

- NOTES3:
 1.Pitch: 5.08mm Poles: 02-24P
 2.Stripping length: 7-8mm
 3.Operating temperature: -40℃~+105℃
 4.RoHS Compliance

How to order

MX2KM - 5.08 - XXP - XXXX - XX - X - X

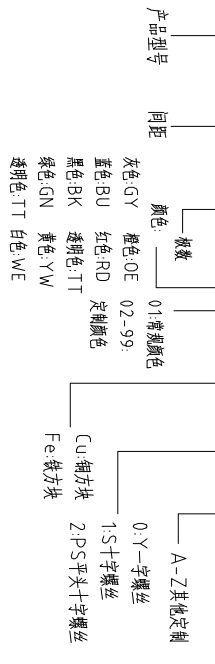

Pitch Range In mm	Nominal Dimension Range In mm	Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	NAME		
CXI MAIXU ELECTRONICS CO.,LTD 慈溪市迈旭电子有限公司			NAME		
			DWGNO.		