
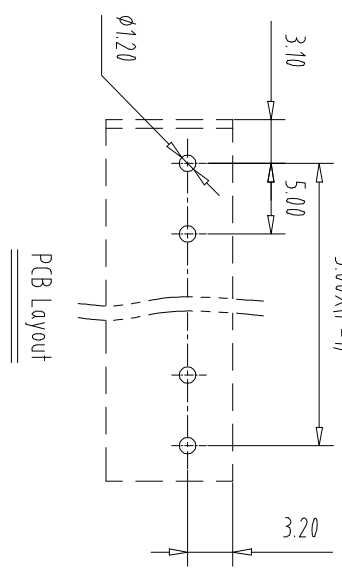
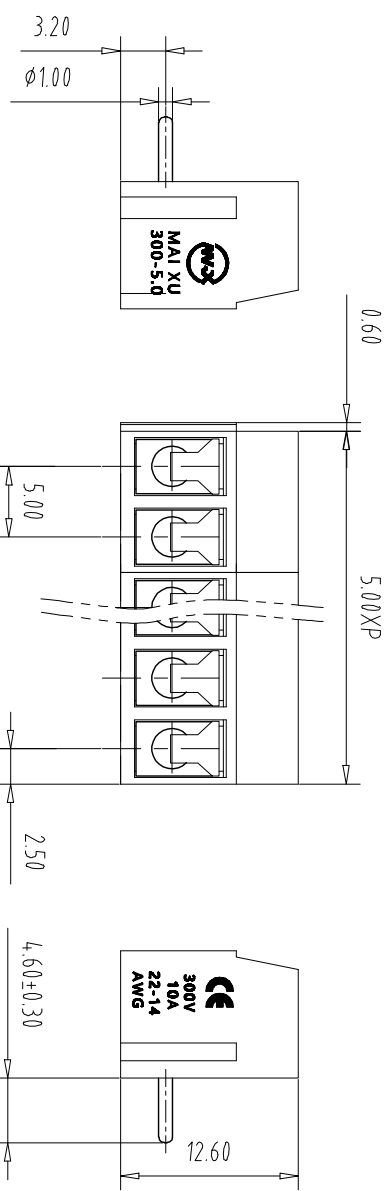


注：本板为禁止运输、复制、编辑文件，以及用其内容进行交流

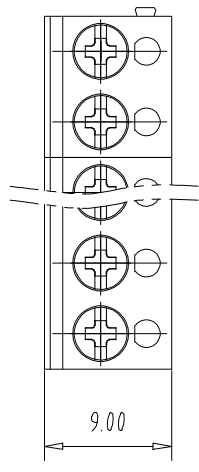

REV	ECN NO.	CONTENT	CHK	DATE


- NOTES 1:
UL Standard
1.Rating voltage/current: 300V//10A
2.withstanding voltage: AC2000V//1Min
3.Torque value: M3, 4,4.3Lb.in
4.Wire range: 22~14AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(kV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

- NOTES 2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Copper alloy(Sn Plated)
3.Spring: Stainless Steel
4.Screw: Steel(M3,Zn Plated)

- NOTES 3:
1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 5-6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
MX300R - 5.0 - XXP - XXXX - XX - X - X

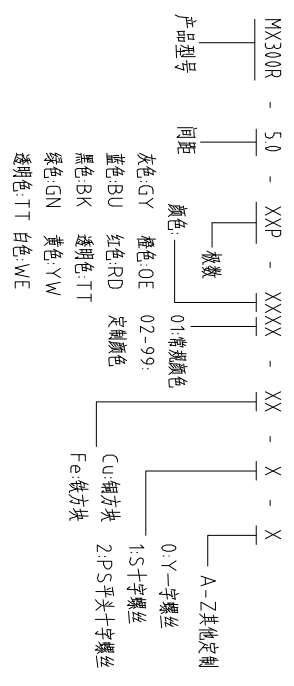

Pitch Range In mm	Nominal Dimension In mm	Range	Symbol					
Over 6 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	Over 150 TO	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	A4		
CIXI MAIXU ELECTRONICS CO.,LTD			NAME	MX300R-5.0-XXP	
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		