
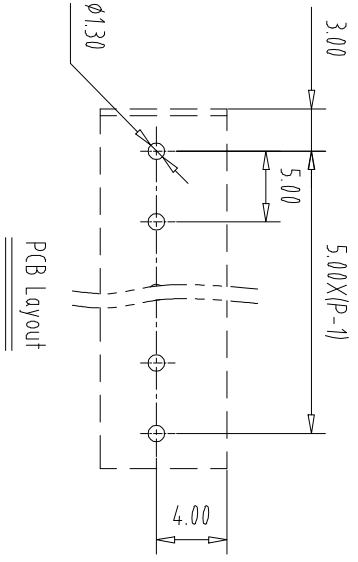

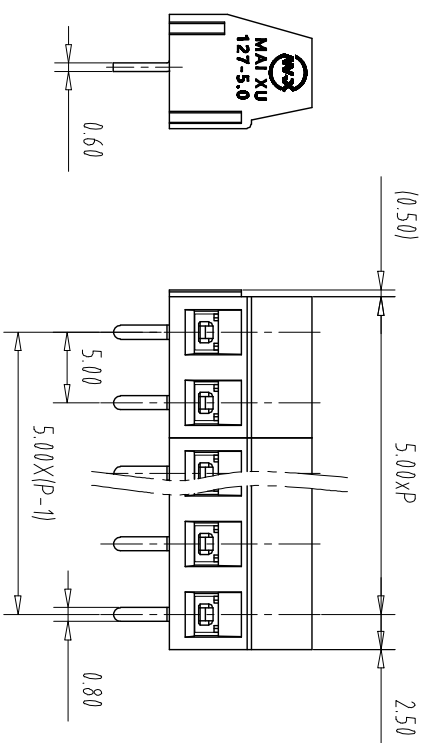


注：本板为禁止传输、复制、编辑文件，以及用其内容进行交流

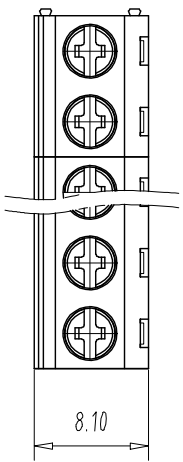

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:  
 UL Standard  
 1.Rating voltage/current: 300V//10A  
 2.withstanding voltage: AC2000V//1Min  
 3.Torque value: M2.5, 3.54Lbin  
 4.Wire range: 26~14AWG  
 IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(kV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

NOTES2:  
 1.Housing: PA66(UL94V-0)  
 2.Cage: Brass(Ni Plated)  
 3.Solder Pin: Copper alloy(Sn Plated)  
 4.Screw: Steel(M2.5,Zn Plated)

NOTES3:  
 1.Pitch: 5.0mm Poles: 02-24P  
 2.Stripping length: 6-7mm  
 3.Operating temperature: -40℃~+105℃  
 4.RoHS Compliance

How to order  
 MX127 - 50 - XXP - XXXX - XX - X - X  
 产品型号 间距 颜色 极数  
 灰色:GY 橙色:OE 01:带极颜色  
 蓝色:BU 红色:RD 02-99:  
 黑色:BK 透明色:TT 定制颜色  
 绿色:GN 黄色:YW  
 透明色:TT 白色:WE  
 A-Z其他定制  
 0:Y一字螺丝  
 1:S十字螺丝  
 2:P.S平头十字螺丝  
 Cu:铜方块  
 Fe:铁方块

Pitch	Range	In mm	Nominal Dimension	Range	In mm	Over	6	10	24	30	60	100	150	Over	150	0.1/10
TO	6	10	TO	30	TO	60	TO	100	TO	150	TO	150	TO	150	TO	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD					NAME
MAIXU 慈溪市迈旭电子有限公司					MX127-5.0-XXP
DWGNO.					