
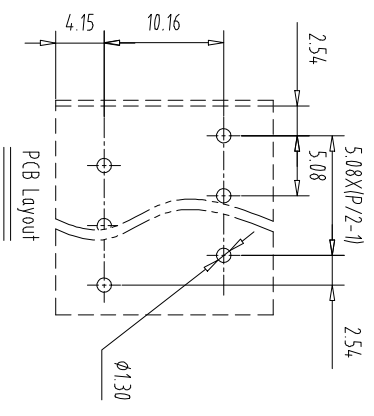
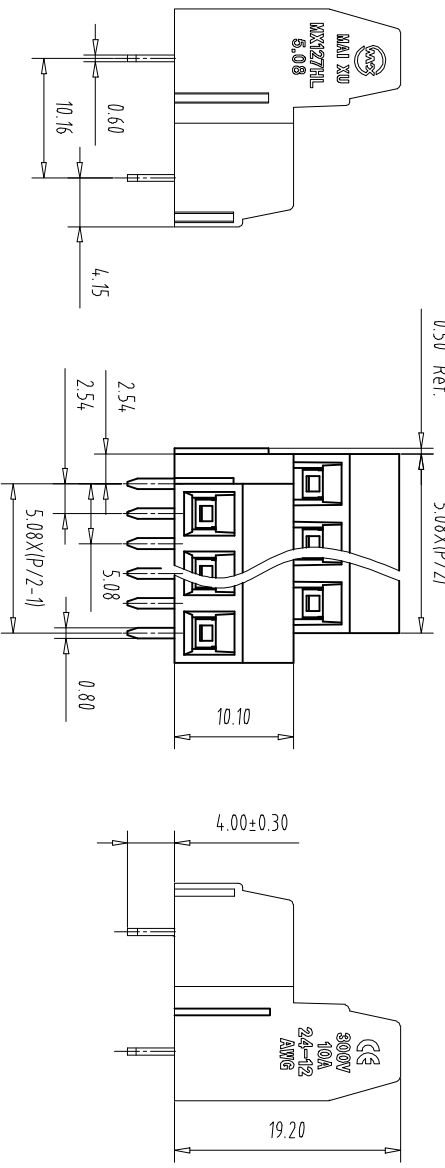


注：本板为禁止传输、复制、编辑、修改、以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

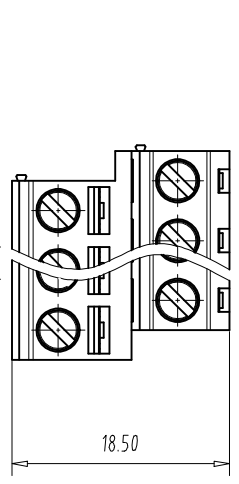

- NOTES1:
- UL Standard
- 1.Rating voltage/current: 300V//10A
  - 2.withstanding voltage: AC2000V//1Min
  - 3.Torque value: M2.5, 3.54Lb.in
  - 4.Wire range: 24~12AWG
- IEC Standard


1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

- NOTES2:
- 1.Housing: PA66(UL 94V-0)
  - 2.Cage: Brass(Ni Plated)
  - 3.Solder Pin 1: Copper alloy(Sn Plated)
  - 4.Solder Pin 2: Copper alloy(Sn Plated)
  - 5.Screw: Steel(M2.5,Zn Plated)

- NOTES3:
- 1.Pitch: 5.08mm Poles: 04-48P
  - 2.Stripping length: 6-7mm
  - 3.Operating temperature: -40℃~+105℃
  - 4.RoHS Compliance

How to order

MX127HLA - 508 - XXP - XXXX - XX - X - X

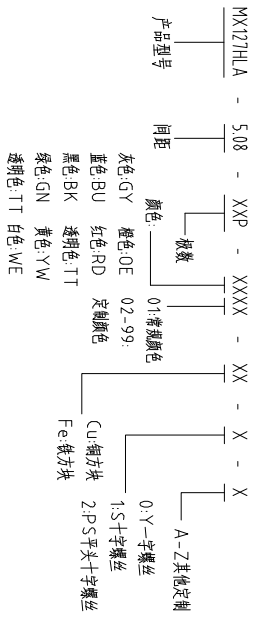

Pitch	Range	In	Nominal Dimension	Range		
mm	Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
	TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
						TO 150
						TO 300

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	A4		
	NAME				
	MX127HLA-5.08-XXP				
	DWGNO.				

CIXI MAIXU ELECTRONICS CO.,LTD

慈溪市迈旭电子有限公司