
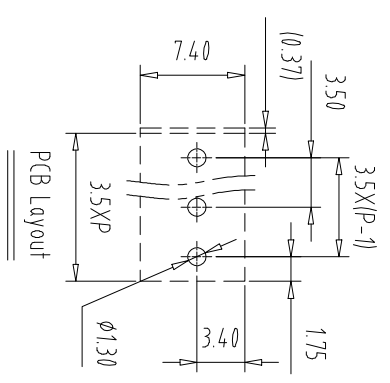

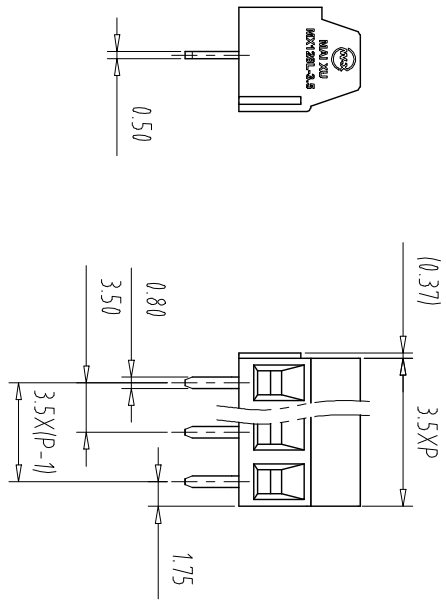


注：本板为禁止运输、复制、翻印或传播，以及用其内容进行复制或传播。



Pitch Range In mm	Nominal Dimension In mm	Range
Over 6	Over 10	Over 30
TO 6	TO 10	TO 30
Over 10	Over 24	Over 60
TO 10	TO 24	TO 60
Over 150	Over 150	Over 150
TO 150	TO 150	TO 150

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

Use group	B	C	D
Rated Current	10A	/	10A
Rated Voltage	300V	/	300V

1. Torque value: M2, 1.77Lbin  
 2. Torque value: M2, 1.77Lbin  
 3. Wire range: 26~16AWG  
 IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	200V	400V
Rate Current(A)	10A	10A	10A

2. Torque value: M2, 0.2Nm  
 3. wire range: 1.0mm<sup>2</sup>


NOTES2:

- Housing: PA66(UL94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Cage: Brass(Ni Plated)
- Screw: Steel(M2,Zn Plated)

NOTES3:

- Pitch: 3.5mm Poles: 02-24P
- Stripping length: 5-6mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

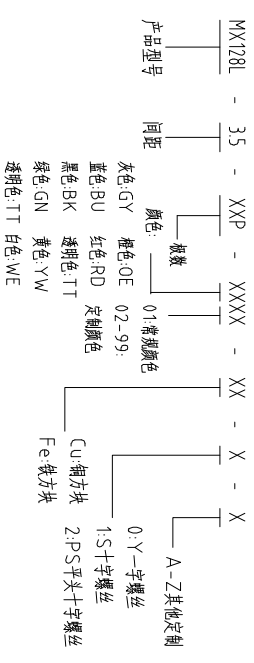

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	NAME		
CIXI MAIXU ELECTRONICS CO.,LTD			MX128L-35-XXP		
慈溪市迈旭电子有限公司			DWGNO.		