
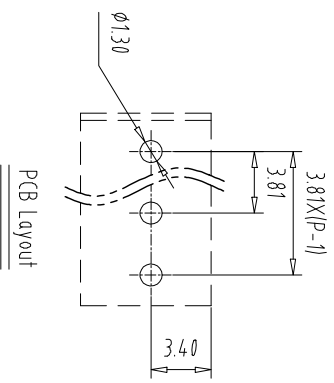

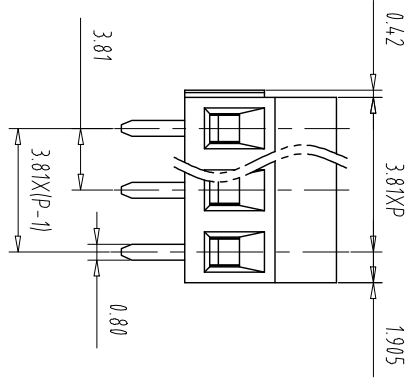



注：本板为禁止运输、复制、编辑文件，以及用其内容进行交流



REV	ECN NO.	CONTENT	CHK	DATE

- NOTES1:  
UL Standard  
1.Rating voltage/current: 150V/10A  
2.withstanding voltage: AC1600V/1Min  
3.Torque value: M2, 1.77Lb.in  
4.Wire range: 26~16AWG  
IEC Standard


Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5	2.5	2.5
Rate Voltage(V)	160V	200V	400V
Rate Current(A)	10A	10A	10A

1. Torque value: M2, 0.2Nm  
3.wire range: 1.0mm<sup>2</sup>

- NOTES2:  
1.Housing: PA66(UL94V-0)  
2.Solder Pin: Copper alloy(Sn Plated)  
3.Cage: Brass(Ni Plated)  
4.Screw: Steel(M2,Zn Plated)

- NOTES3:  
1.Pitch: 3.81mm Poles: 02-24P  
2.Stripping length: 5-6mm  
3.Operating temperature: -40℃~+105℃  
4.RoHS Compliance

How to order

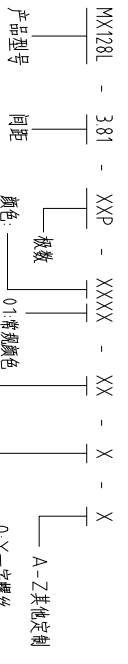

Pitch	Range	In	Nominal Dimension	Range		
mm	Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
	TO 6	TO 10	TO 24	TO 30	TO 60	TO 100

mm	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	SCALE	1/1
APP	DATE			A4	1/1
				NAME	MX128L-3.81-XXP
				DWGNO.	

CXI MAIXU ELECTRONICS CO.,LTD  
慈溪市迈旭电子有限公司