

注：本板为禁止运输、复制、编辑文件，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES:

UL Standard

1	Use group	B	C	D
	Rated Current	10A	/	10A
	Rated Voltage	300V	/	300V

- 2. Torque value: M2.5, 3.54Lb.in
- 3. Wire range: 22~12AWG

IEC Standard

1	Pollution Degree	3	2	2
	Overvoltage Category	III	III	II
	Rate Impulse Voltage(kV)	/	/	/
	Rate Voltage(V)	/	400V	/
	Rate Current(A)	/	15A	/

- 2. Torque value: M2.5, 0.4Nm
- 3. wire range: 0.5~2.5mm²

NOTES2:







- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Copper alloy(Sn Plated)
- 3.Cage: Brass(Ni Plated)
- 4.Screw: Steel(M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX128R - 7.62 - XXP - XXXX - XX - X - X

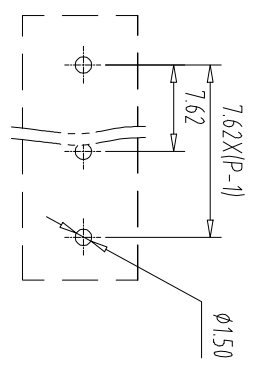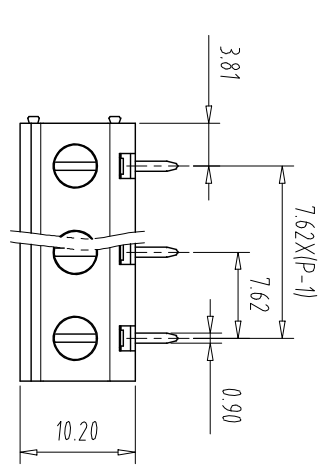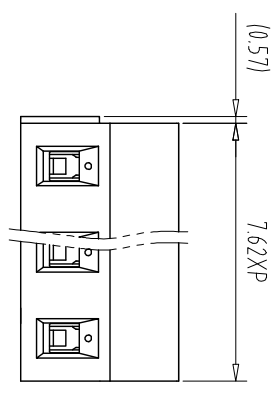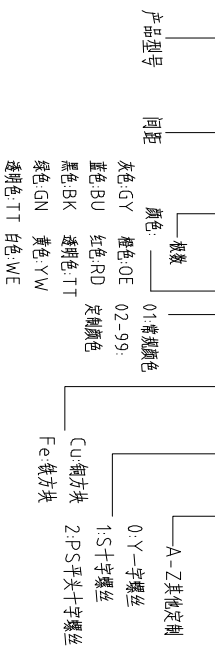

Pitch	Range	In mm	Nominal Dimension	Range		
Over	6	10	30	60	100	150
TO	6	10	24	30	60	100

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE		1:1	A4	
CIXI MAIXU ELECTRONICS CO.,LTD			NAME: MX128R-7.62-XXP		
慈溪市迈旭电子有限公司			DWGNO.		