
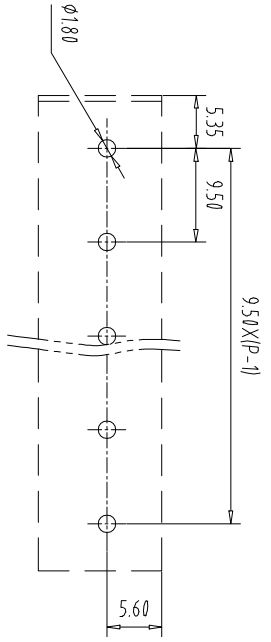
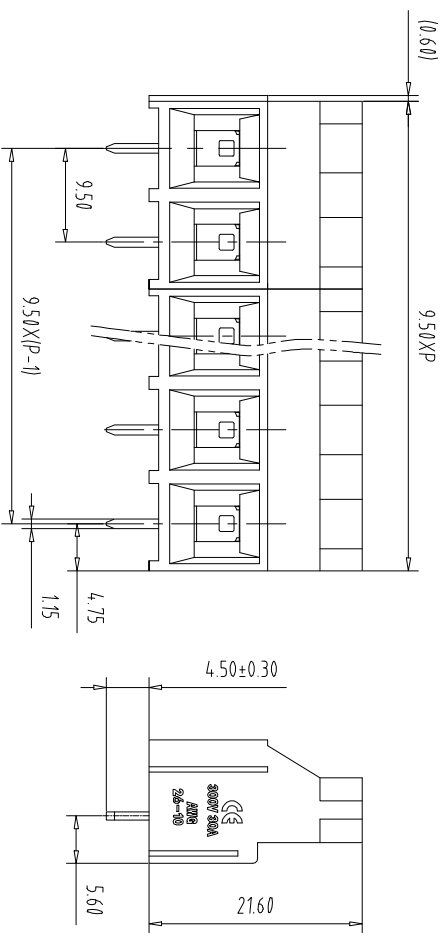


注：本板为禁止传输、复制、编辑、修改、以及利用其内容进行交流

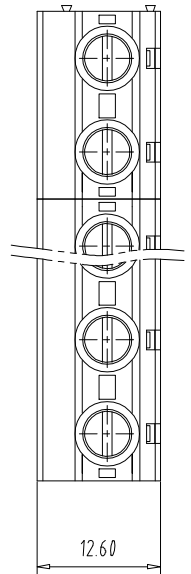

PCB Layout

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:  
UL Standard  
1.Rating voltage/current: 300V/30A  
2.withstanding voltage: AC3000V/1Min  
3.Torque value: M3, 4.43Lb.in  
4.Wire range: 26~10AWG  
IEC Standard  
1.1.Rating voltage/current: 750V/26A  
2. Torque value: M3, 0.5Nm  
3.wire range: 15-4.0mm<sup>2</sup>

NOTES2:  
1.Housing: PA66(UL94V-0)  
2.Solder Pin: Copper alloy(Sn Plated)  
3.Cage: Brass(Ni Plated)  
4.Screw: Steel(M3,Zn Plated)

NOTES3:  
1.Pitch: 9.5mm Poles: 02-24P  
2.Stripping length: 8-9mm  
3.Operating temperature: -40℃~+105℃  
4.RoHS Compliance

How to order  
MX950 - 9.5 - XXP - XXXX - XX - X - X  
产品型号 间距 颜色 极数  
颜色: 01:默认颜色  
灰色:GY 绿色:OE 02-99:  
蓝色:BU 红色:RD 定制颜色  
黑色:BK 透明色:TT  
绿色:GN 黄色:YW  
透明色:TT 白色:WE

Cu:铜方块  
Fe:铁方块  
A-Z其他定制  
0:Y一字螺丝  
1:S十字螺丝  
2:P:平头十字螺丝

Pitch	Range	In	Nominal	Dimension	Range		
mm	Over	Over	Over	Over	Over	Over	0.1/10
	6	10	10	30	60	100	±
	TO	TO	TO	TO	TO	TO	
	6	10	24	30	60	100	±
	TO	TO	TO	TO	TO	TO	
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
							±1.30
							±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
	DATE	NAME	MX950-9.50-XXP		
		DWGNO.			

CIXI MAIXU ELECTRONICS CO.,LTD  
慈溪市迈旭电子有限公司