
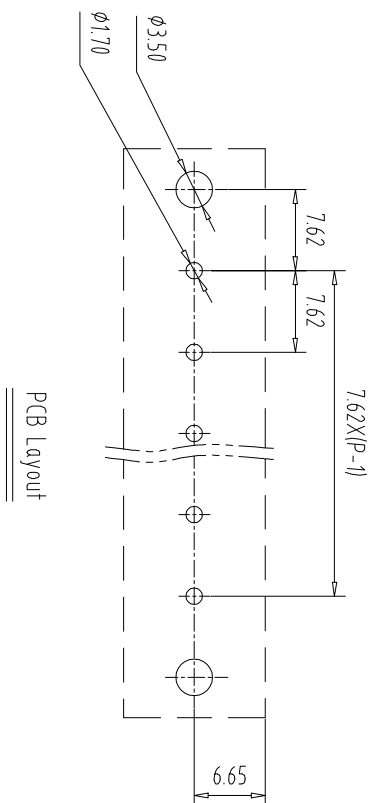

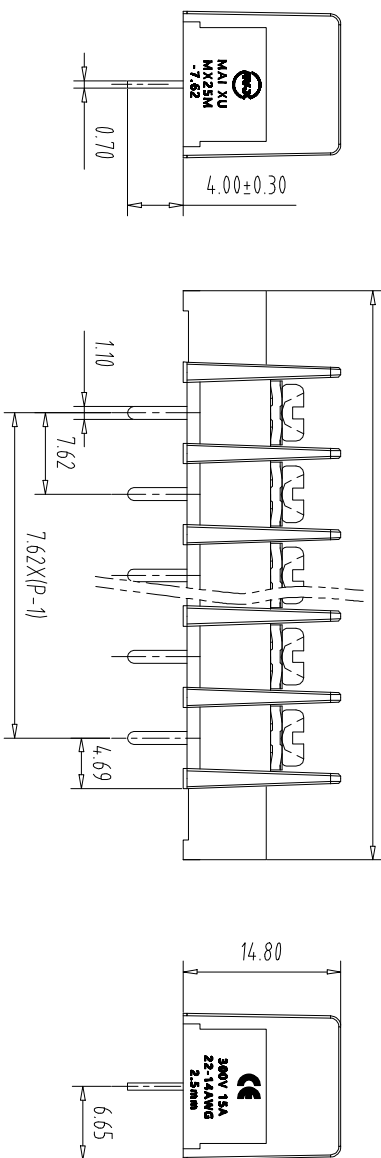


注：本板为禁止运输、复测、维修器件，以及用其内部零件做交流

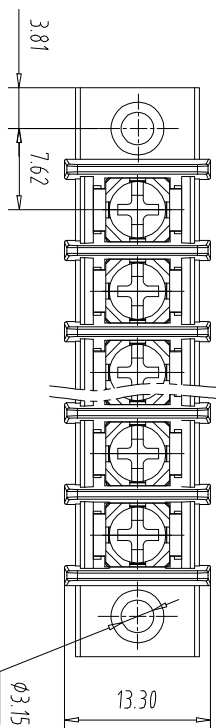

Pitch Range In mm	Nominal Dimension Range				
	In mm	Over	TO	Over	TO
6	10	10	24	30	60
10	10	10	24	30	60
150	100	100	150	150	150

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:  
UL Standard

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

2. Torque value: M3, 4.43Lb.in

3. Wire range: 22~14AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

2. Torque value: M3, 0.5Nm  
3. wire range: 15mm<sup>2</sup>


NOTES 2:

- 1. Housing: PA66(UL 94V-0)
- 2. Solder Pin: Copper alloy(Sn Plated)
- 3. Screw: Steel(M3, Ni Plated)

NOTES 3:

- 1. Pitch: 7.62mm Poles: 02-24P
- 2. Operating temperature: -40°C~+105°C
- 3. RoHS Compliance

How to order

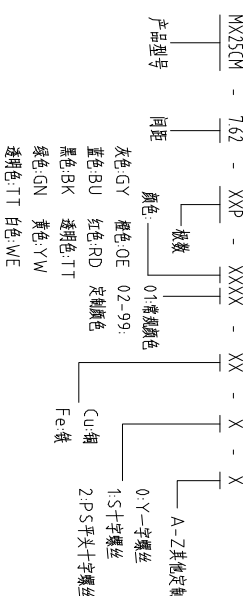

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1

MAXXU  
CIXI MAXXU ELECTRONICS CO.,LTD  
慈溪市迈旭电子有限公司

NAME: MX25CM-7.62-XXP  
DWGNO.