

注: 本板为禁止运输、复制、编辑文件, 以及用其内容进行交流

REV	ECN NO.	2	CONTENT	CHK	DATE
-----	---------	---	---------	-----	------

NOTES1:

UL Standard

1 Use group	B	C	D
Rated Current	5A	/	/
Rated Voltage	150V	/	/

2 withstanding voltage: AC1300V/1Min

IEC Standard

1 Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	1.5KV	2.5KV	2.5KV
Rate Voltage(V)	80V	160V	200V
Rate Current(A)	5A	5A	5A

NOTES2:

1 Housing: PA66 (UL94V-0)

2 Solder Pin: Brass (Sn Plated)

NOTES3:

1 Pitch: 2.54mm Poles: 02-24P

2 Operating temperature: -40℃~+105℃


3 RoHS Compliance

How to order

MX2EDGRC - 2.54 - XXP - XXXX - XX - X

产品型号 间距 板数 颜色: 01-带板颜色 02-99: A-7其他定制

颜色: 灰色:GY 橙色:OE 定制颜色
 蓝色:BU 红色:RD
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 透明色:TT 白色:WE

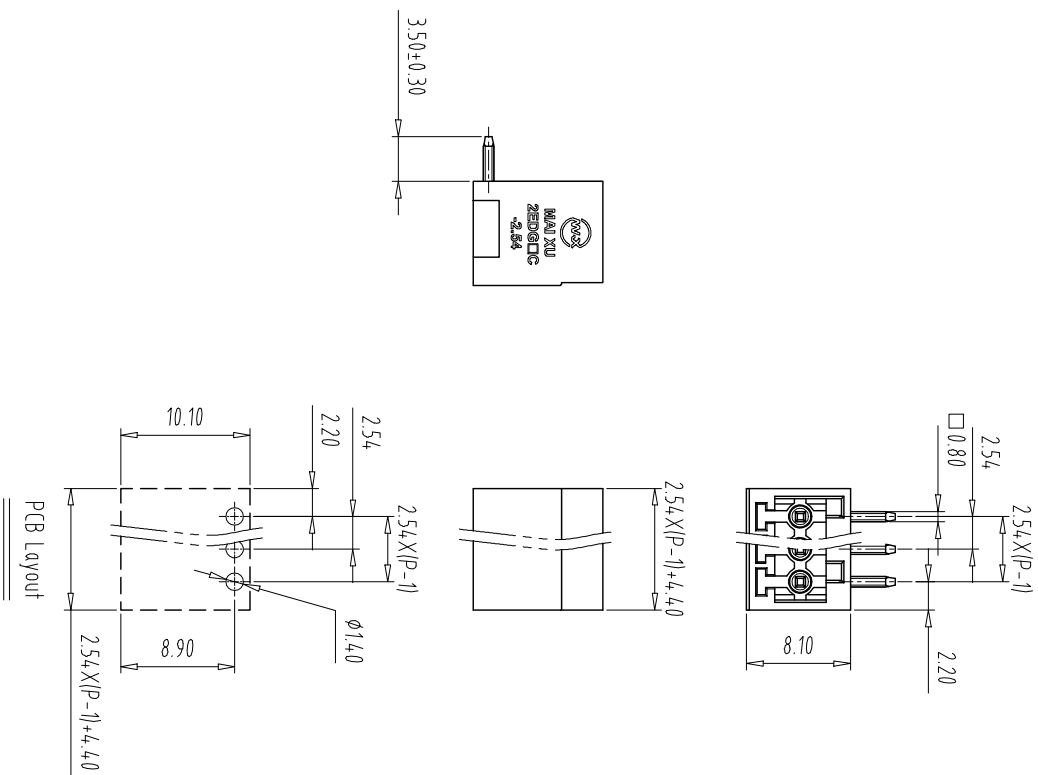

Pitch Range		Nominal Dimension		Range	
mm	In	mm	In	mm	In
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
				±1.00	±1.30
					±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
				NAME	
				MX2EDGRC-2.54-XXP	
				DWGNO.	

CIJI MAIXU ELECTRONICS CO.,LTD
 慈溪市迈旭电子有限公司