
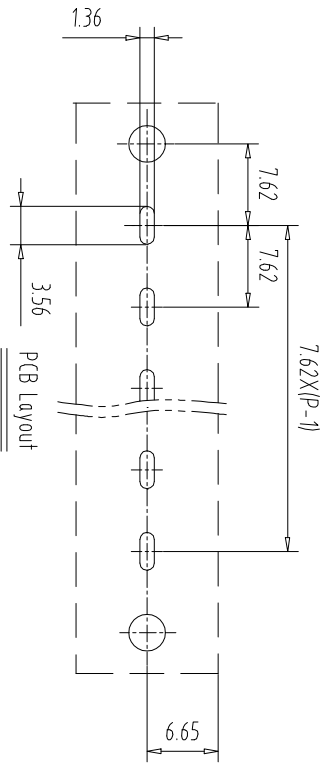
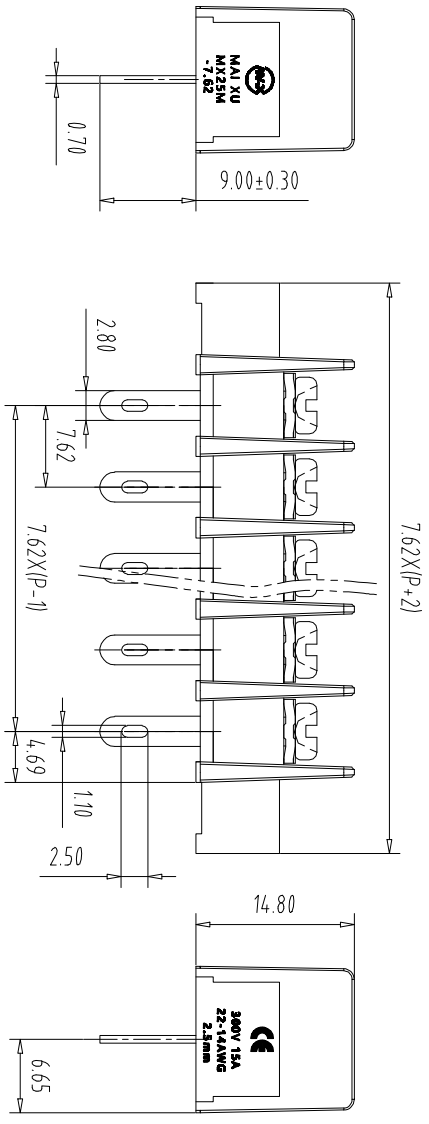


注：本图仅供参考，复制、编辑文件，以及引用时请谨慎交流

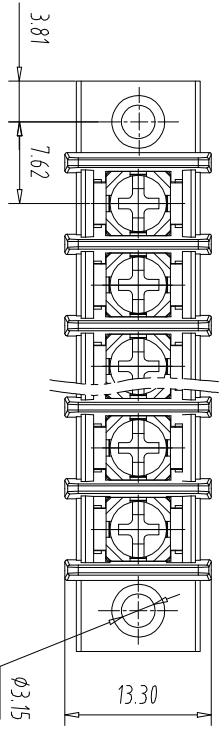

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:  
UL Standard

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

- 2. Torque value: M3, 4, 4.3Lb.in
- 3. Wire range: 22~14AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

- 2. Torque value: M3, 0.5Nm
- 3. wire range: 15mm<sup>2</sup>


NOTES2:

- 1. Housing: PA66(UL 94V-0)
- 2. Solder Pin: Copper alloy(Sn Plated)
- 3. Screw: Steel(M3, Ni Plated)

NOTES3:

- 1. Pitch: 7.62mm Poles: 02-24P
- 2. Operating temperature: -40℃~+105℃
- 3. RoHS Compliance

How to order

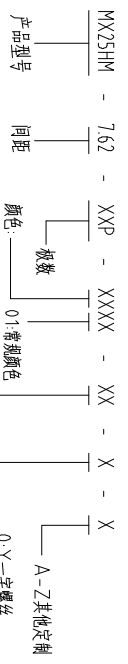

Pitch Range In mm	Nominal Dimension In mm	Range	Symbol					
Over 6 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	Over 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	A4		
CIXI MAIXU ELECTRONICS CO.,LTD			NAME: MX25HM-7.62-XXP		
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		