

注: 本板为禁止传输、复制、编辑、修改、以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:
UL Standard

Use group	B	C	D
Rated Current	4A	4A	4A
Rated Voltage	150V	150V	150V

2. Wire range: 26~20AWG
IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	2.5KV
Rate Voltage(V)	/	/	250V
Rate Current(A)	/	/	5A






NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Buffer: POM
- 4.Conductor: Copper alloy (Ni Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 2.5mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

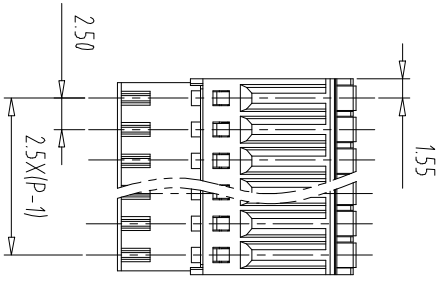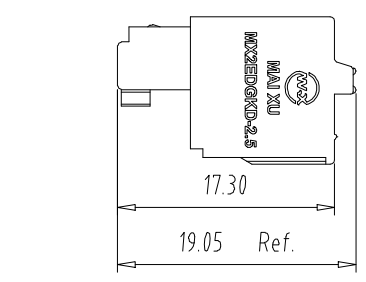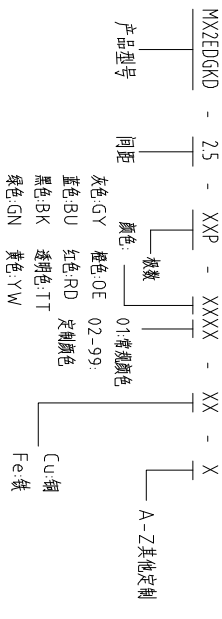

Pitch Range	In mm	Nominal Dimension	Range
Over 6	Over 10	Over 30	Over 60
TO 6	TO 10	TO 30	TO 60
Over 10	Over 24	Over 60	Over 100
TO 10	TO 24	TO 30	TO 60
Over 150	Over 150	Over 150	Over 150
0.1/10	0.1/10	0.1/10	0.1/10
±0.15	±0.20	±0.30	±0.30
±0.20	±0.30	±0.30	±0.50
±0.30	±0.30	±0.50	±0.70
±1.00	±1.00	±1.00	±1.30
±2°	±2°	±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	1:1	A4	
CIXI MAIXU ELECTRONICS CO.,LTD			MXZEDGKD-2.5-XXP		
慈溪市迈旭电子有限公司			DWGNO.		