
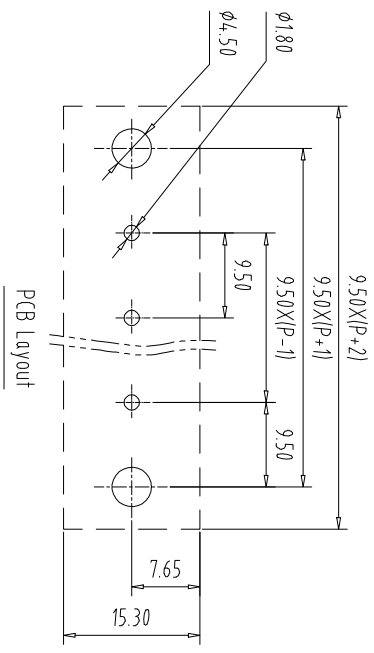
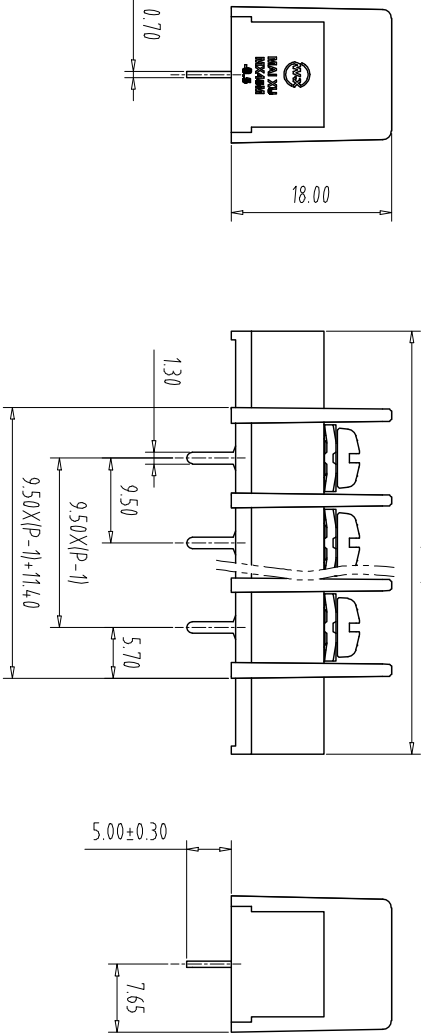


注: 本图仅供参考, 复制、翻印、扫描、以及用其他设备复制

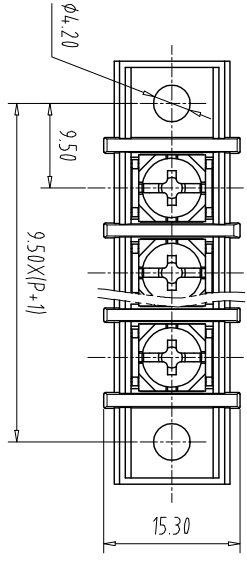

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:
UL Standard

1	Use group	B	C	D
Rated Current	20A	/	/	/
Rated Voltage	300V	/	/	/

- 2. Torque value: M4, 10.53Lb.in
- 3. Wire range: 22~12AWG

IEC Standard

1	Pollution Degree	3	2	2
Overvoltage Category	III	III	II	II
Rate Impulse Voltage(KV)	/	/	4	/
Rate Voltage(V)	/	/	400V	/
Rate Current(A)	/	/	24A	/

- 2. Torque value: M4, 1.2Nm
- 3. wire range: 0.5-4.0mm²


NOTES 2:

- 1. Housing: PA66(UL94V-0)
- 2. Solder Pin: Copper alloy(Sn Plated)
- 3. Screw: Steel(M4, Ni Plated)

NOTES 3:

- 1. Pitch: 9.50mm Poles: 02-24P
- 2. Operating temperature: -40℃~+105℃
- 3. RoHS Compliance

How to order

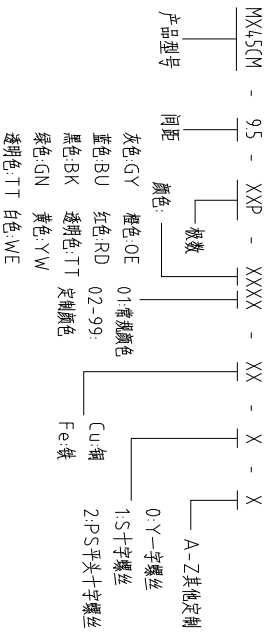

Pitch Range In mm	Nominal Dimension Range In mm				Pitch Range In mm
	Over	TO	Over	TO	
6	10	10	30	30	6
10	10	24	60	60	10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX45CM-9.5-XXP		
慈溪市迈旭电子有限公司			DWGNO.		