





注：本板为禁止运输、复制、翻印文件，以及用其内容进行交流

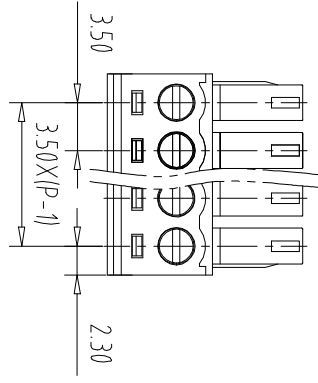

NOTES1:

UL Standard	1. Use group	B	C	D
Rated Current	8A	/	/	8A
Rated Voltage	300V	/	/	300V

- 2. Torque value: M2.0, 1.77LbIn
- 3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

- 2. Torque value: M2, 0.2Nm
- 3. wire range: 0.2~1.5mm<sup>2</sup>

NOTES2:

- 1. Housing: PA66 (UL94V-0)
- 2. Cover: PA66 (UL94V-0)
- 3. Cage: Brass (Ni Plated)
- 4. Clamp: Copper alloy (Ni Plated)
- 5. Screw: Steel (M2.0, Zn Plated)

NOTES3:

- 1. Pitch: 3.5mm Poles: 02-24P
- 2. Stripping length: 6-7mm
- 3. Operating temperature: -40℃~+105℃
- 4. RoHS Compliance

How to order

MX15EDGK - 3.5 - XXP - XXXX - XX - X - X

产品型号

间距

颜色

极数

0-Y一字螺丝

A-Z其他定制

- 灰色:GY 橙色:OE
- 蓝色:BU 红色:RD
- 黑色:BK 透明色:TT
- 绿色:GN 黄色:YW
- 透明色:TT 白色:WE

- Cu:铜方块
- 1:S十字螺丝
- 2:PS平头十字螺丝
- Fe:铁方块

Pitch Range In mm

Nominal Dimension Range In mm

Over	Over	Over	Over	Over	Over	Over	Over
6	10	24	30	60	100	100	150
TO	TO	TO	TO	TO	TO	TO	TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

—

0.1/10

∠

±2°

REV	ECN NO.	CONTENT	CHK	DATE

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	22.09.14	MM	1/1
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	MX15EDGK-3.5-XXP		

CI XI MAIXU ELECTRONICS CO.,LTD  
慈溪市迈旭电子有限公司

DWGNO. 1