





注：本板为禁止传输、复制、编辑文档，以及用其内容进行交流

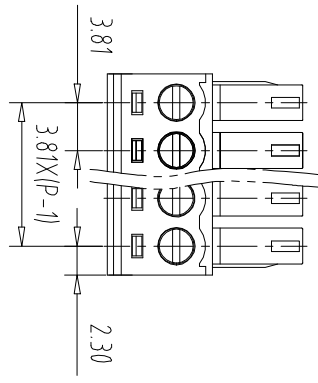

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77Lbin

3. Wire range: 28~16AWG


IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

- NOTES2:
1. Torque value: M2, 0.2Nm
 2. Torque value: 0.2~15mm²
 3. wire range: 0.2~15mm²

- NOTES3:
1. Housing: PA66 (UL94V-0)
 2. Cover: PA66 (UL94V-0)
 3. Cage: Brass (Ni Plated)
 4. Clamp: Copper alloy (Ni Plated)
 5. Screw: Steel (M2.0, Zn Plated)

- NOTES4:
1. Pitch: 3.81mm Poles: 02-24P
 2. Stripping length: 6-7mm
 3. Operating temperature: -40℃~+105℃
 4. RoHS Compliance

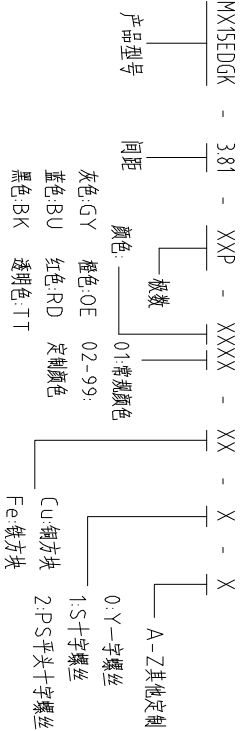

Pitch Range In mm

Over	Nominal Dimension	Range
6	In mm	-
TO	10	0.1/10
6	TO	∠
10	TO	∠
24	TO	∠
30	TO	∠
60	TO	∠
100	TO	∠
150	TO	∠
±0.15	±0.20	±0.30
±0.30	±0.50	±0.70
±0.50	±1.00	±1.30
±1.00	±1.50	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	A4		
CXI MAIXU ELECTRONICS CO.,LTD					MX15EDGK-3.81-XXP
慈溪市迈旭电子有限公司					DWGNO.