
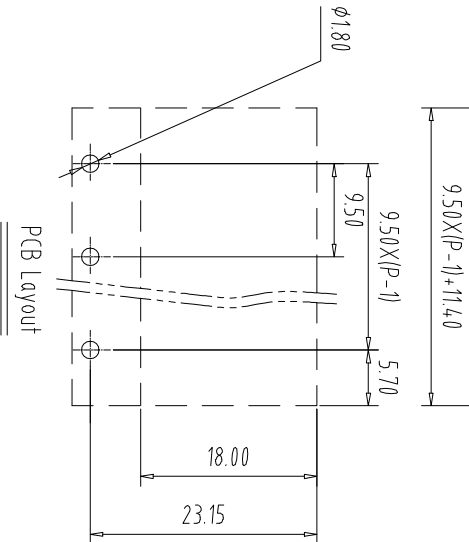
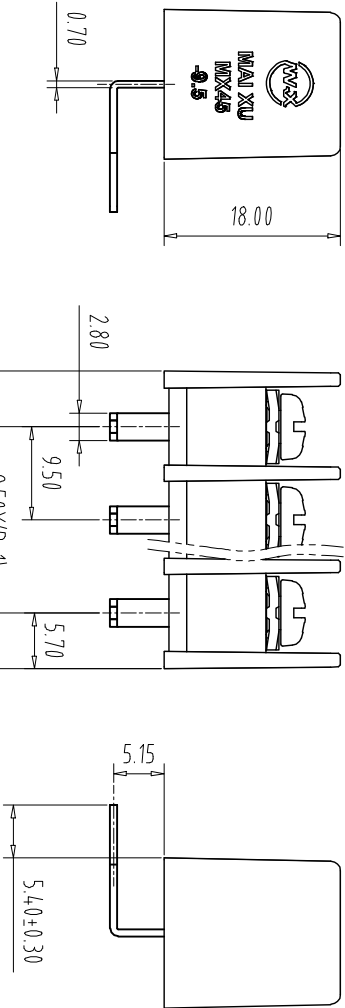


注: 本图只作基本传输、复制、编辑使用, 以及用其内容进行标注

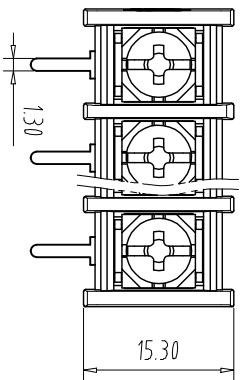

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
				±1.00	±1.30
					±2°

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:
UL Standard

1 Use group	B	C	D
Rated Current	20A	/	/
Rated Voltage	300V	/	/

- Torque value: M4, 10.53Lb.in
- Wire range: 22~12AWG

IEC Standard

1 Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	24A	/

- Torque value: M4, 1.2Nm
- Wire range: 0.5-4.0mm²


NOTES 2:

- Housing: PA66(UL94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Screw: Steel(M4, Ni Plated)

NOTES 3:

- Pitch: 9.50mm Poles: 02-24P
- Operating temperature: -40°C~+105°C
- RoHS Compliance

How to order

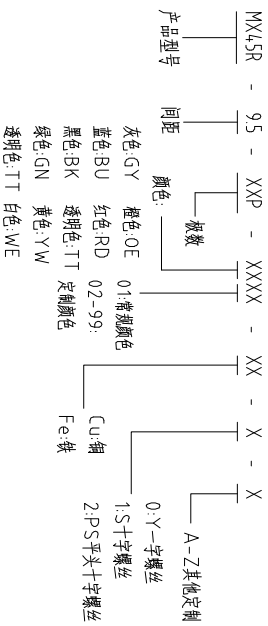

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	DATE	UNITS	MM
APP.	DATE	SCALE	SCALE	SHEET/OF	1/1
				A4	
				NAME	
				MX45R-9.5-XXP	
				DWGNO.	



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司

DWGNO.