

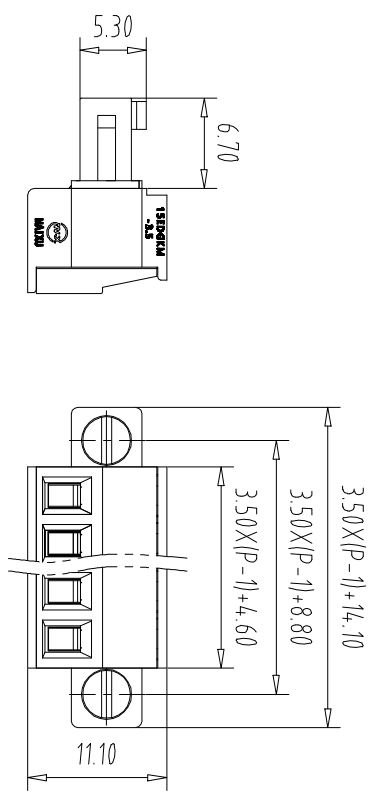


注: 本板为禁止运输、复制、编辑文件, 以及用其内容进行交流

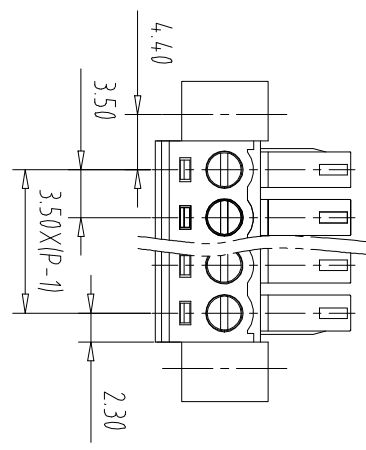

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:1
UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77Lbin
3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

- NOTES2:
- 1.Housing: PA66 (UL94V-0)
 - 2.Cover: PA66 (UL94V-0)
 - 3.Cage: Brass (Ni Plated)
 - 4.Clamp: Copper alloy (Ni Plated)
 - 5.Screw 1: Steel (M2.0,Zn Plated)
 - 6.Screw 2: Steel (M2.5,Zn Plated)
- NOTES3:
- 1.Pitch: 3.5mm Poles: 02-24P
 - 2.Stripping length: 6-7mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

How to order

MX15EDGKM - 35 - XXP - XXXX - XX - X - X

产品型号 间距 颜色 极数 01:常规颜色
灰色:GY 橙色:OE 02-99:
蓝色:BU 红色:RD 定制颜色
黑色:BK 透明色:TT
绿色:GN 黄色:YW
透明色:TT 白色:WE

A-Z其他定制
0-Y一字螺丝
1-S十字螺丝
Cu:铜方块
Fe:铁方块
2-P.S平头十字螺丝

Pitch Range In mm	Nominal Dimension Range In mm	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	APP	DATE	SCALE	NAME

DATE: 22.09.14
SCALE: 1:1
NAME: MX15EDGKM-35-XXP

ITEM: NAME OF PART, NO. OF PART, Q'TY, MATERIAL, NOTE
DWG: CHK, APP, DATE, SCALE, NAME
DATE: 22.09.14, SCALE: 1:1, NAME: MX15EDGKM-35-XXP

CIXI MAIXU ELECTRONICS CO.,LTD
慈溪市迈旭电子有限公司

DWGNO. 1