
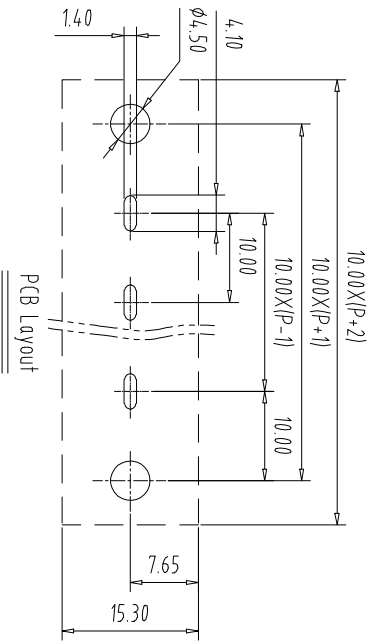
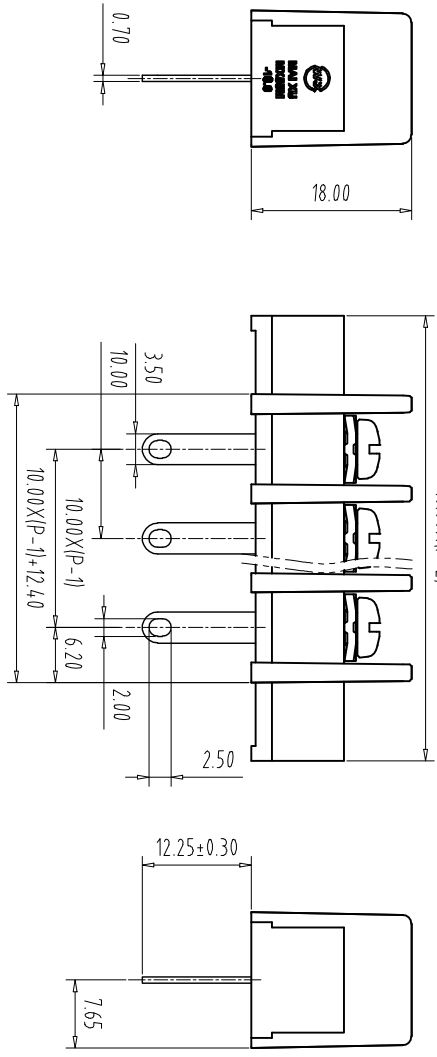


注: 本图只作基本运输、复制、编辑被文档, 以及附具内详细标注

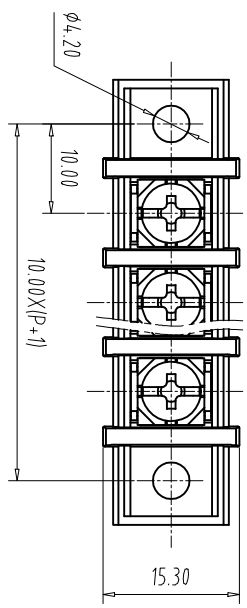

Pitch Range In mm		Nominal Dimension Range In mm	
Over 6	Over 10	Over 30	Over 60
TO 6	TO 10	TO 30	TO 60
Over 10	Over 24	Over 60	Over 100
TO 10	TO 24	TO 60	TO 100
Over 150	Over 150	Over 150	Over 150
TO 150	TO 150	TO 150	TO 150
±0.15	±0.20	±0.30	±0.30
±0.30	±0.30	±0.50	±0.50
±0.70	±1.00	±1.00	±1.30
±2°	±2°	±2°	±2°

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:  
UL Standard

1 Use group	B	C	D
Rated Current	20A	/	/
Rated Voltage	300V	/	/

2. Torque value: M4, 10.53Lb.in  
3. Wire range: 22~12AWG  
IEC Standard


1. Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	/	4	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	24A	/

2. Torque value: M4, 1.2Nm  
3. wire range: 0.5-4.0mm<sup>2</sup>

- NOTES 2:  
1. Housing: PA66(UL94V-0)  
2. Solder Pin: Copper alloy(Sn Plated)  
3. Screw: Steel(M4, Ni Plated)

- NOTES 3:  
1. Pitch: 10.0mm Poles: 02-24P  
2. Operating temperature: -40°C~+105°C  
3. RoHS Compliance

How to order

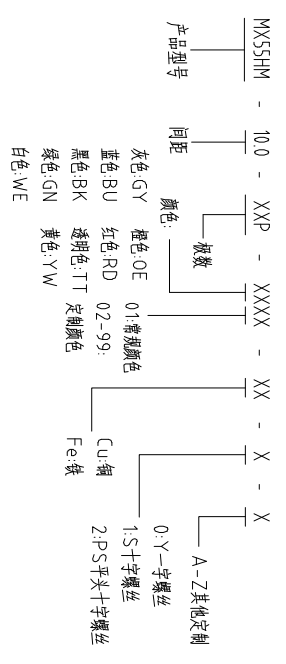

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	UNITS	MM	1/1
APP.	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			NAME		
MAIXU 慈溪市迈旭电子有限公司			MX55HM-10.0-XXP		
DWGNO.					