
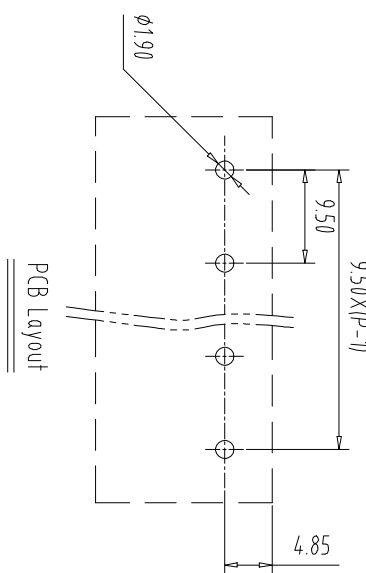
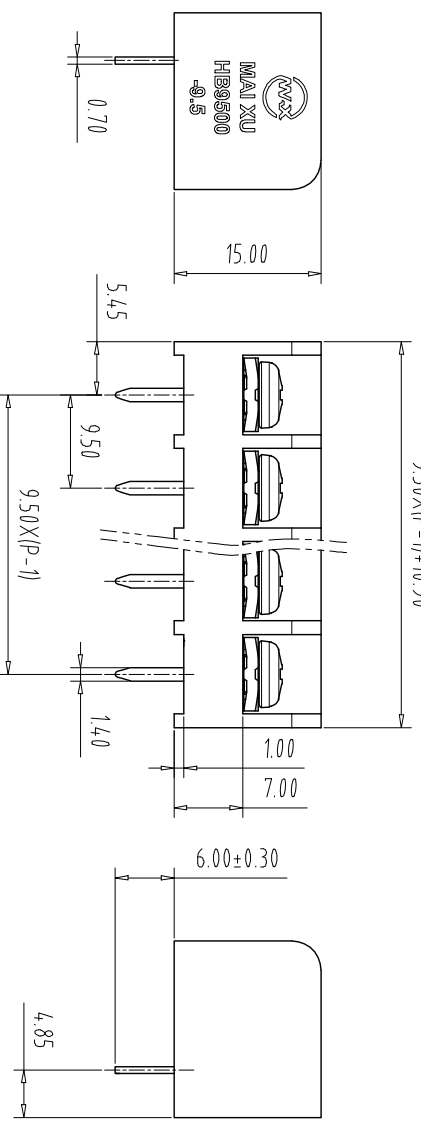


注: 本图仅供参考, 复制、编辑文档, 以及用其内容进行标注

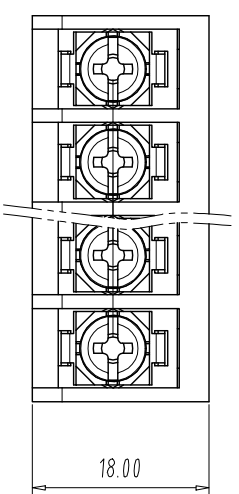

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:
UL Standard

Use group	B	C	D
Rated Current	20A	20A	10A
Rated Voltage	300V	300V	300V

- Torque value: M4, 10.53Lb.in
- Wire range: 22~10AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	6	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	17.5A	/

- Torque value: M4, 1.2Nm
- Wire range: 0.5-4.0mm²


NOTES 2:

- Housing: PA66(UL94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Screw: Steel(M4, Ni Plated)

NOTES 3:

- Pitch: 9.50mm Poles: 02-24P
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

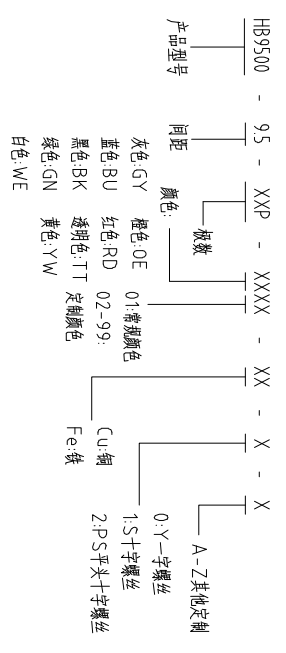

Pitch Range In mm	Nominal Dimension Range In mm				Over 150	0.1/10		
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	HB9500-9.5-XXP		

CIXI MAIXU ELECTRONICS CO.,LTD.
慈溪市迈旭电子有限公司