
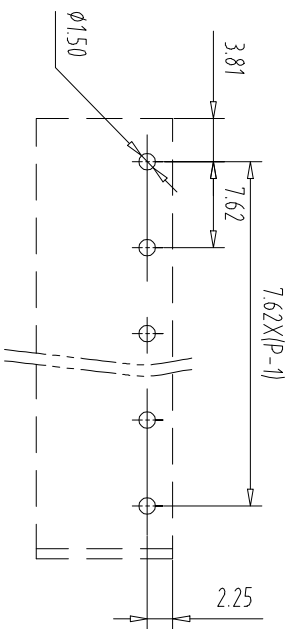

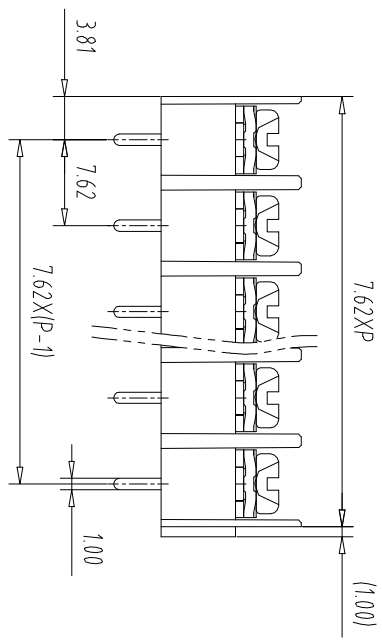


注：本型产品禁止传输、复制、编辑被控文件，以及用其内容建设数据库

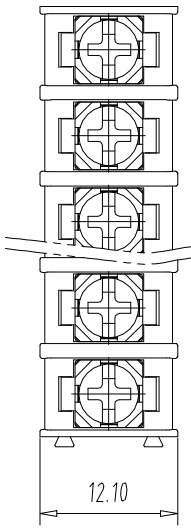

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

- UL Standard
 1.Rating voltage/current: 300V/20A
 2.withstanding voltage: AC2500V/1Min
 3.Torque value: M3, 4.43Lb.in
 4.Wire range: 22~12AWG
 IEC Standard
 1.Rating voltage/current: 450V/17.5A
 2. Torque value: M3, 0.5Nm
 3.wire range: 2.5mm²


NOTES2:

- 1.Housing: PA66(UL 94V-0)
 2.Screw: Steel(M3 Ni Plated)
 3.Solder Pin: Copper alloy(Sn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
 2.Operating temperature: -40℃~+105℃
 3.RoHS Compliance

How to order

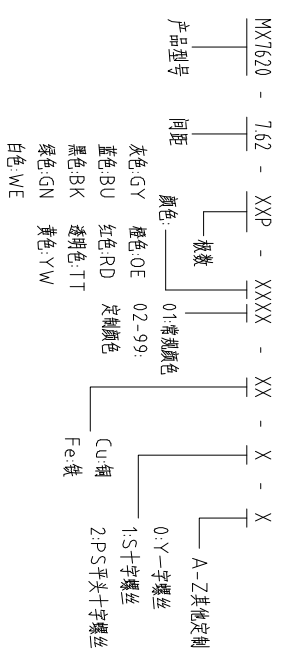

Pitch Range In		Nominal Dimension Range		In mm	
Over	TO	Over	TO	Over	TO
6	10	30	60	100	150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00

—	∩	□
---	---	---

0.1/10	∠
--------	---

±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°
-------	-------	-------	-------	-------	-------	-------	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.		NAME		MX7620-7.62-XXP	
MAIXU 慈溪市迈旭电子有限公司		DWGNO.			