
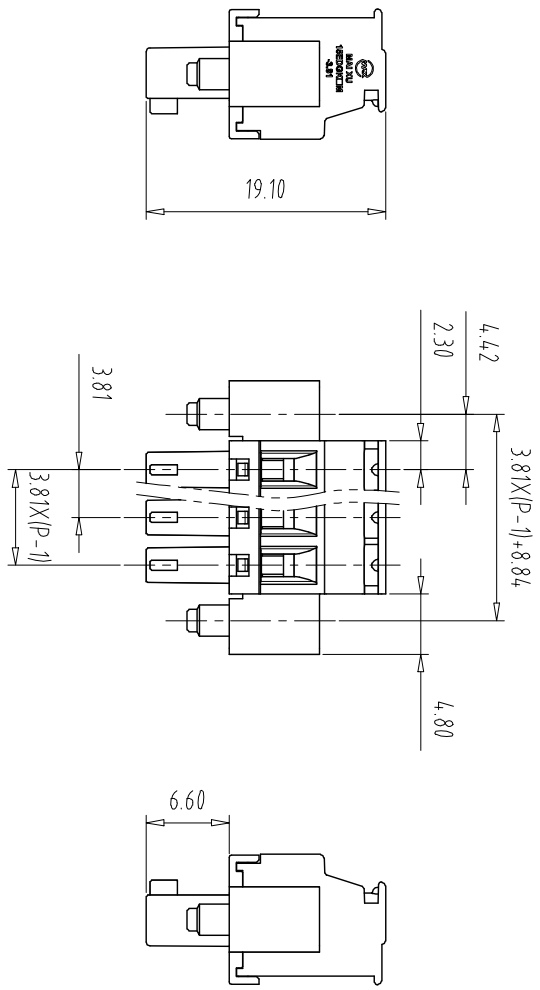


注: 本图只作禁止传输、复制、编辑、修改、以及附具内详细标注

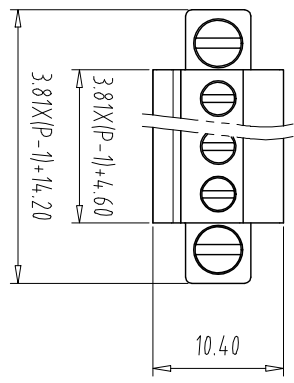

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

- UL Standard
- | | | | |
|---------------|------|---|------|
| 1. Use group | B | C | D |
| Rated Current | 8A | / | 8A |
| Rated Voltage | 300V | / | 300V |
2. Torque value: M2.0, 1.77Lbin
3. Wire range: 28~16AWG
- IEC Standard
- | | | | |
|--------------------------|-------|-------|-------|
| 1. Pollution Degree | 3 | 2 | 2 |
| Overvoltage Category | III | III | II |
| Rate Impulse Voltage(KV) | 2.5KV | 2.5KV | 2.5KV |
| Rate Voltage(V) | 160V | 160V | 250V |
| Rate Current(A) | 7A | 7A | 7A |

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Clamp: Copper alloy (Ni Plated)
- 4.Cage: Brass (Ni Plated)
- 5.Screw1: Steel (M2,Zn Plated)
- 6.Screw1: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 4.RoHS Compliance

How to order

MX15EDGKAM - 381 - XXP - XXXX - XX - X - X

产品型号 间距 颜色 规格

01:常规颜色
 灰色:GY 橙色:OE 02-99:
 蓝色:BU 红色:RD 定制颜色
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 白色:WE

A-Z其他定制
 0-Y一字螺丝
 1-S十字螺丝
 2-PS平头十字螺丝
 Cu:铜方块 Fe:铁方块

Pitch Range In mm	Nominal Dimension Range In mm						Over 150	0.1/10
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	±2°	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	23.06.20	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	MX15EDGKAM-381-XXP		

NAME: MX15EDGKAM-381-XXP

DATE: 23.06.20

SCALE: 1:1

SHEET/OF: A4

UNIT: MM

QTY: 1/1

MAIXU 慈溪市迈旭电子有限公司