

注: 本资料禁止传输、复制、编辑或存档, 以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:  
UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

1. Wire range: 28~16AWG  
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. wire range: 0.2~1.5mm<sup>2</sup>



NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Buffer: POM
- 4.Conductor: Copper alloy (Ni Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

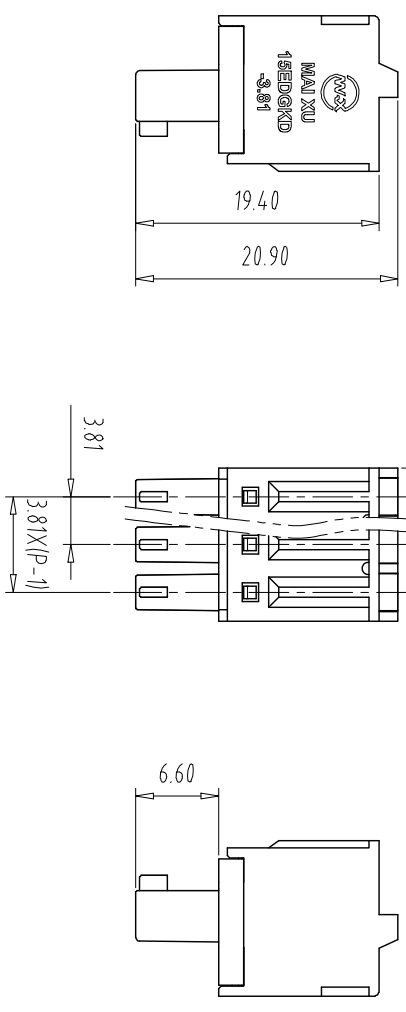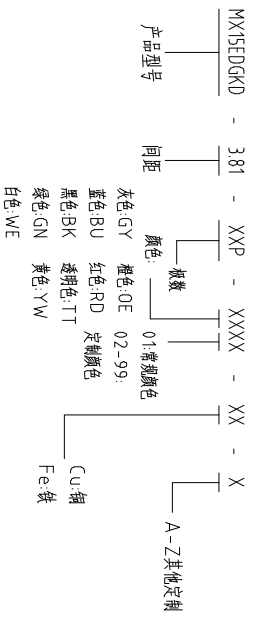

Pitch	Range	In	Nominal	Dimension	Range
mm	Over	In	mm	Over	In
	6	10	30	60	100
	TO	TO	TO	TO	TO
	6	10	24	30	60
	TO	TO	TO	TO	TO
	±0.15	±0.20	±0.30	±0.30	±0.50
					±0.70
					±1.00
					±1.30
					±2°

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MX15EDGKD-3.81-XXP	
			DWGNO.		