

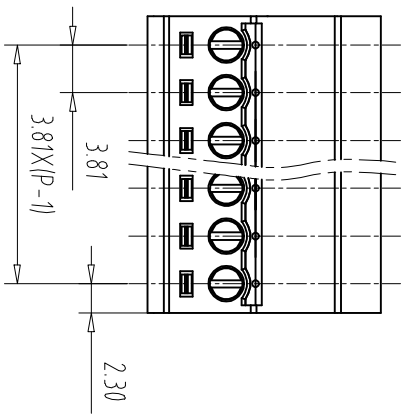


注: 本图仅供参考, 复制、编辑文档, 以及制作模具时请依据



REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard	1. Use group	B	C	D
Rated Current	8A	/	/	8A
Rated Voltage	300V	/	/	300V

2. Torque value: M2.0, 1.77Lb.in

3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm

3. wire range: 0.2~1.5mm²

NOTES2:

- 1. Housing: PA66 (UL94V-0)
- 2. Cover: PA66 (UL94V-0)
- 3. Cage: Brass (Ni Plated)
- 4. Conductor: Copper alloy (Sn Plated)
- 5. Screw: Steel (M2.0, Zn Plated)

NOTES3:


- 1. Pitch: 3.81mm Poles: 02-24P
- 2. Stripping length: 7-8mm
- 3. Operating temperature: -40℃~+105℃
- 4. RoHS Compliance

How to order

MX15EDGRK - 3.81 - XXXP - XXXX - XX - X - X



- 灰色:GY 棕色:OE 02-99: 常规颜色
- 蓝色:BU 红色:RD 定制颜色
- 黑色:BK 透明色:TT
- 绿色:GN 黄色:YW
- 白色:WE



Pitch Range In mm	Nominal Dimension Range In mm						Tolerance			
	Over	TO	Over	TO	Over	TO				
6	6	10	10	24	30	60	100	150	0.1/10	±2°
TO	TO	TO	TO	TO	TO	TO	TO	TO	≤	
±0.15	±0.20	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	DATE	SCALE	1:1
APP.	DATE			A4	
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司					DWGNO.
MX15EDGRK-3.81-XXXP					