

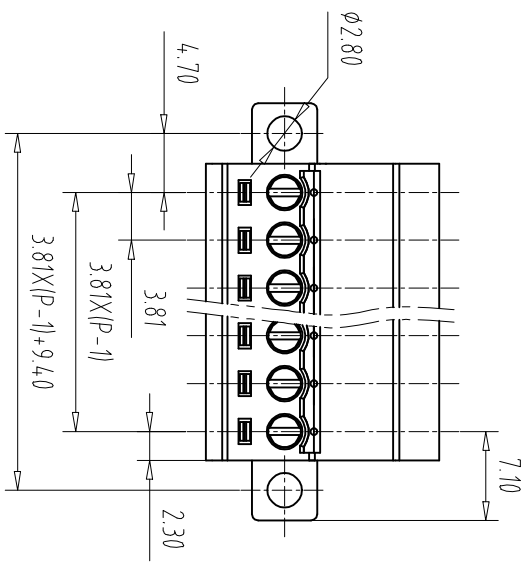


注: 本资料禁止传输、复制、编辑或存档, 以及用其内容进行复制

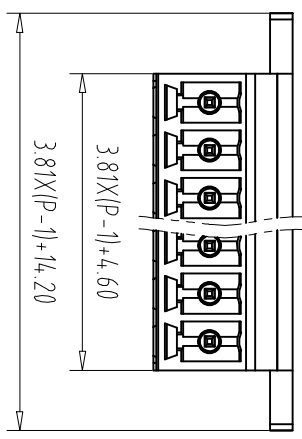

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77lb·in
3. Wire range: 28~16AWG
IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm
3. wire range: 0.2~1.5mm²
NOTES2:


- 1. Housing: PA66 (UL94V-0)
- 2. Cover: PA66 (UL94V-0)
- 3. Cage: Brass (Ni Plated)
- 4. Conductor: Copper alloy (Sn Plated)
- 5. Screw: Steel (M2.0, Zn Plated)

NOTES3:

- 1. Pitch: 3.81mm Poles: 02-24P
- 2. Stripping length: 7-8mm
- 3. Operating temperature: -40℃~+105℃
- 4. RoHS Compliance

How to order

MX15EDGRKF - 381 - XXP - XXXX - XX - X - X

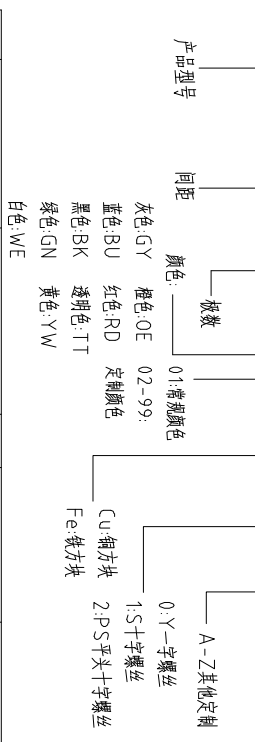

Pitch Range In mm	Nominal Dimension Range					In mm	- / □
	Over	TO	Over	TO	Over		
6	6	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	24.03.13	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME			
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司					DWGNO.
					MX15EDGRKF-381-XXP