

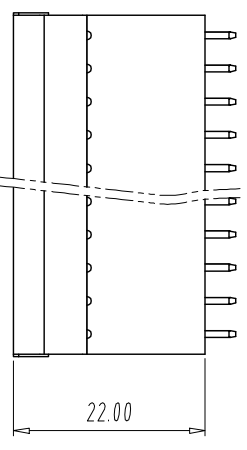
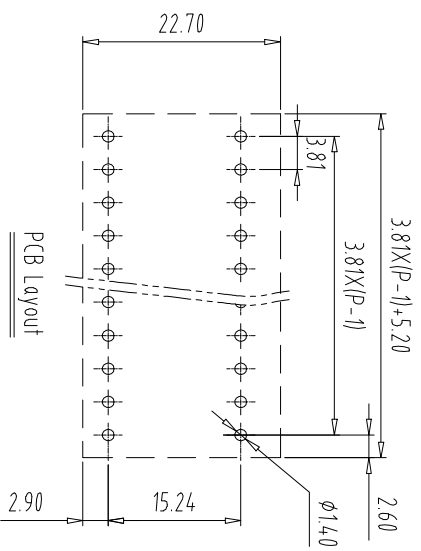



注: 本资料禁止传输、复制、编辑、修改, 以及用其内容进行任何交流

REV	ECN NO.	CONTENT	CHK	DATE



3.50±0.30

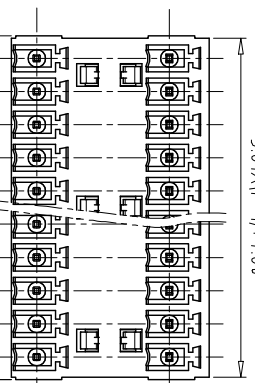

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A


NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Solder Pin: Brass (Sn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 2x(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

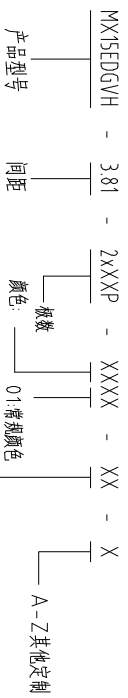

Pitch Range In mm		Nominal Dimension Range In mm		Pitch Range In mm		Nominal Dimension Range In mm	
Over 6	TO 10	Over 10	TO 24	Over 30	TO 60	Over 60	TO 100
Over 10	TO 150	Over 150	TO 150	Over 150	TO 150	Over 150	TO 150

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	SHEET/OF	1/1
APP.	DATE	SCALE	1:1	A4	1/1

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	SHEET/OF	1/1
APP.	DATE	SCALE	1:1	A4	1/1
NAME		MX15EDGVH-381-2XXXX			

MAIXU 慈溪市迈旭电子有限公司

MAIXU CIXI MAIXU ELECTRONICS CO.,LTD.