
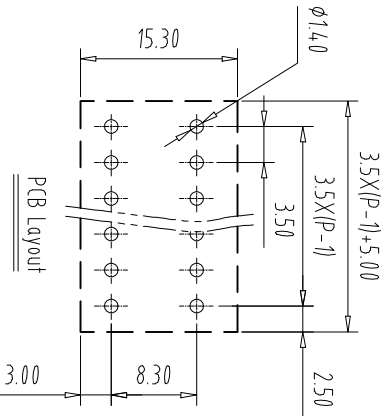

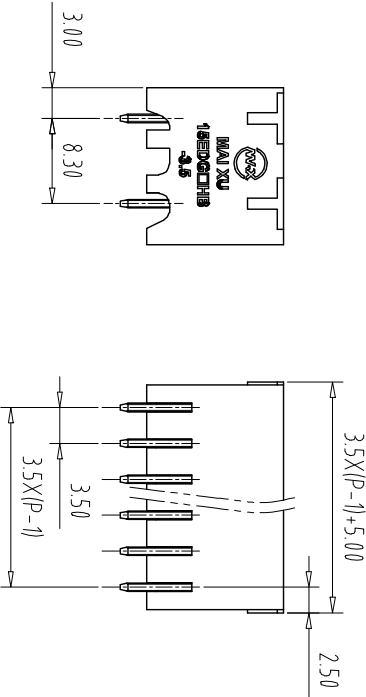


注: 本资料禁止传输、复制、编辑被控文件, 以及用其内容进行标注



REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	/	/
Rated Voltage	300V	/	/

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:


- 1.Housing: PA66 (UL94V-0)
- 2.Solder Pin: Brass (Sn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

MX15EDGVHB - 35 - 2XXXX - XXXX - X - X

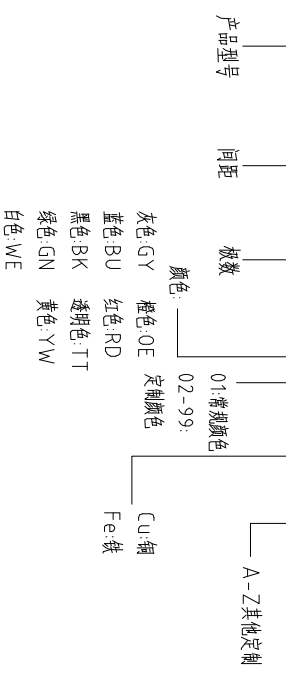

Pitch Range In mm	Nominal Dimension Range				In mm	Pitch Range In mm	Nominal Dimension Range	In mm
	Over	To	Over	To				
6	6	10	10	24	30	60	100	150
TO	TO	TO	TO	TO	TO	TO	TO	TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	SCALE	1:1
APP	DATE	DATE	SCALE	A4	1/1
NAME					MX15EDGVHB-3.5-2XXXX

慈溪市迈旭电子有限公司
CIXI MAIXU ELECTRONICS CO.,LTD.

MX15EDGVHB-3.5-2XXXX