

注：本资料禁止传输、复制、编辑、修改，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	/
Rated Voltage	150V	50V	/

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A





NOTES2:

- 1.Housing: PA (UL94V-0)
- 2.Solder Pin: Brass (Sn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

How to order

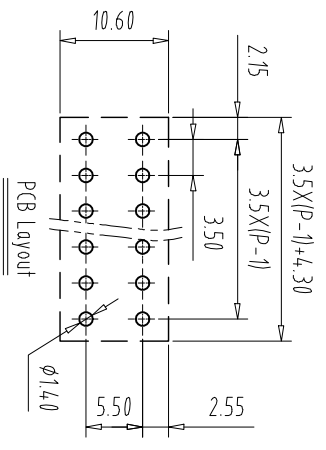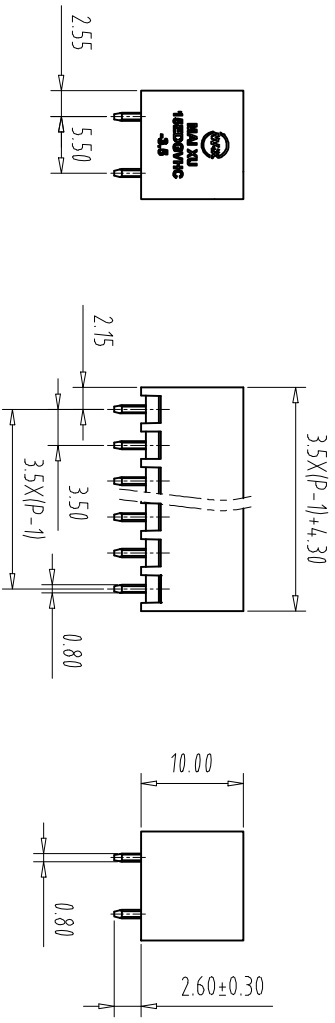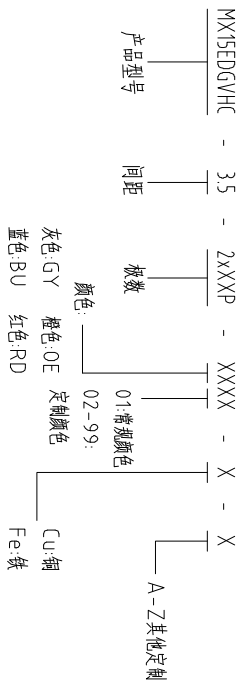

Pitch Range In mm	Nominal Dimension Range			
	In mm	In mm	In mm	In mm
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50
				±0.70
				±1.00
				±1.30
				±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
NAME					
MX15EDGVHC-35-2XXXX					

DATE: 23.06.20

SCALE: 1:1

NAME: MX15EDGVHC-35-2XXXX

DATE: 23.06.20

SCALE: 1:1

NAME: MX15EDGVHC-35-2XXXX

MAIXU 慈溪市迈旭电子有限公司

MAIXU CIXI MAIXU ELECTRONICS CO.,LTD.