
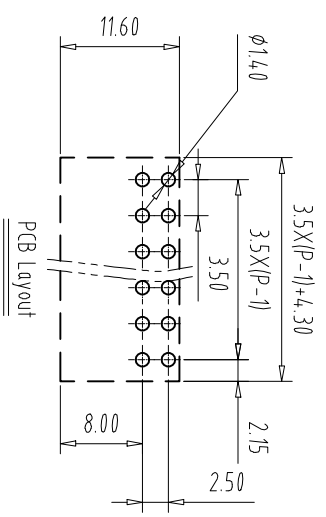
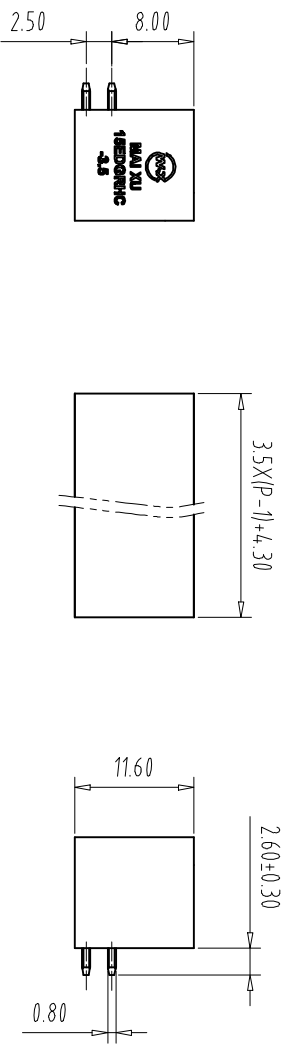


注：本资料禁止传输、复制、编辑、修改，以及用其内容进行标注

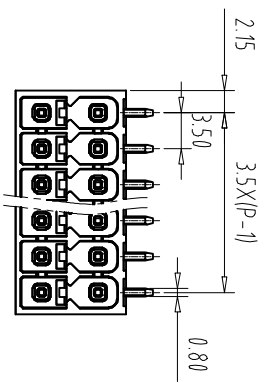

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	/
Rated Voltage	150V	50V	/

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:

- 1.Housing: PA (UL94V-0)
- 2.Long Solder Pin: Brass (Sn Plated)
- 3.Short Solder Pin: Brass (Sn Plated)
- 4.Patch: PA (UL94V-0)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

How to order

MX15EDGRHC - 35 - 2XXXXP - XXXX - X - X

产品型号 间距 极数 颜色: 01:常规颜色 02-99:定制颜色 A-Z其他定制

颜色: 灰色:GY 橙色:OE 定制颜色
 蓝色:BU 红色:RD
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 白色:WE
 Cu:铜 Fe:铁

Pitch Range In mm		Nominal Dimension In mm		Nominal Dimension Range		PCB Layout	
Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF 1/1
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MX15EDGRHC-3.5-2XXXXP	
慈溪市迈旭电子有限公司			DWGNO.		