

注: 本资料禁止传输、复制、编辑或存档, 以及用其内容进行复制或

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	/
Rated Voltage	150V	50V	/

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:





- 1.Housing: PA (UL94V-0)
- 2.Solder Pin: Brass (Sn Plated)
- 3.Nut: Steel (M2,Zn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Operating temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 3.RoHS Compliance

How to order

MX15EDGVHCM - 35 - 2xXXP - XXXX - X - X

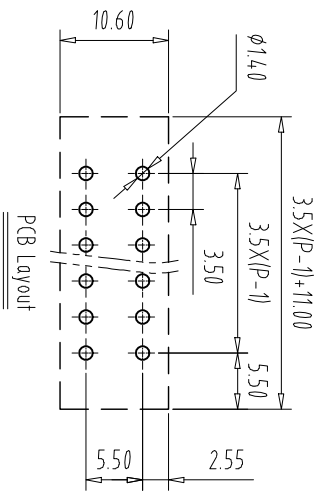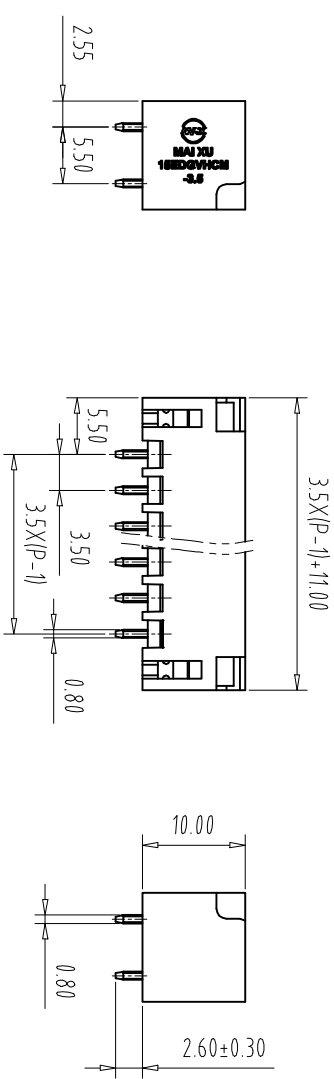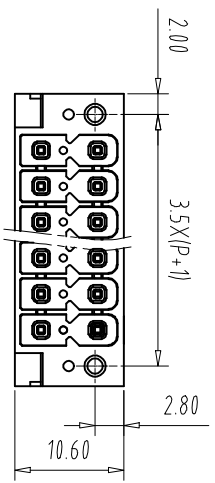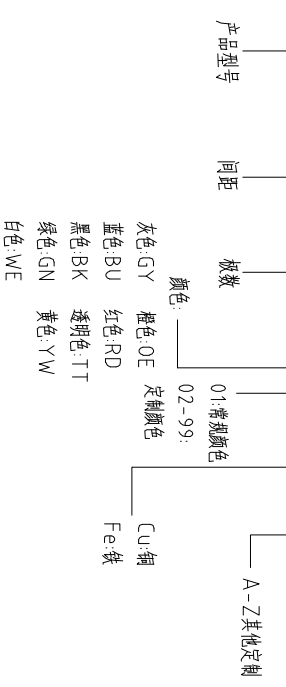

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6	Over 10	Over 30
TO 6	TO 10	TO 30
Over 10	Over 24	Over 60
TO 10	TO 24	TO 60
Over 150	Over 150	Over 150
TO 150	TO 150	TO 150

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°
-------	-------	-------	-------	-------	-------	-------	-------	-----

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.				NAME	MX15EDGVHCM-3.5-2xXXP
慈溪市迈旭电子有限公司				DWGNO.	