

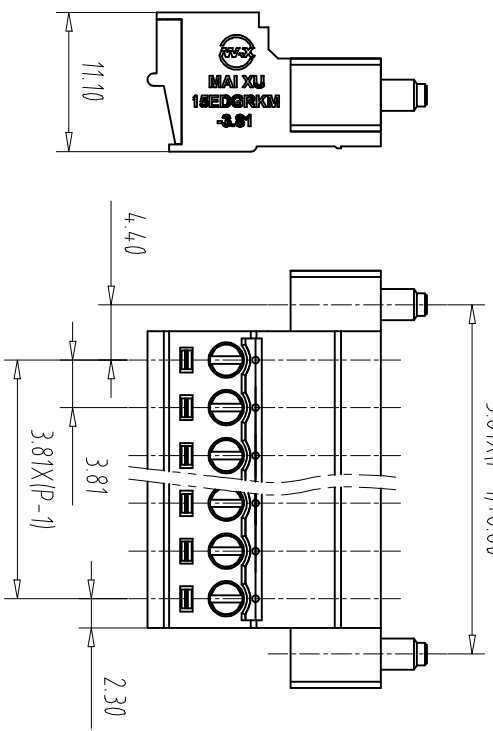


注: 本资料禁止传输、复制、编辑、存档, 以及用其内容进行建设性交流

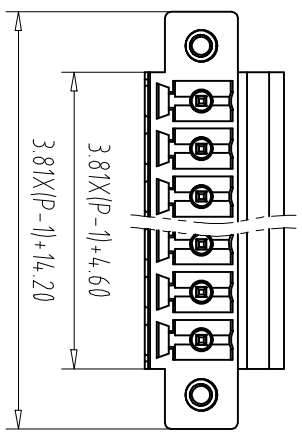

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V


2. Torque value: M2.0, 1.77Lb.in
3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

- NOTES2:
- 1.Housing: PA66 (UL94V-0)
 - 2.Cover: PA66 (UL94V-0)
 - 3.Cage: Brass (Ni Plated)
 - 4.Conductor: Copper alloy (Sn Plated)
 - 5.Screw1: Steel (M2.0,Zn Plated)
 - 5.Screw2: Steel (M2.5,Zn Plated)
- NOTES3:
- 1.Pitch: 3.81mm Poles: 02-24P
 - 2.Stripping length: 7-8mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

How to order
MX15EDGRKM - 381 - XXP - XXXX - XX - X - X

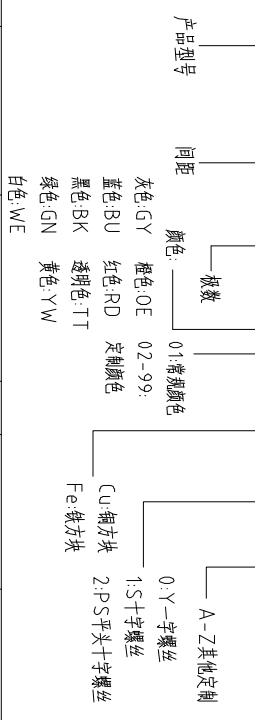

Pitch Range In mm	Nominal Dimension Range In mm				Over 150	0.1/10
	Over 6	Over 10	Over 24	Over 30		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	DATE	SCALE	1:1
APP.	DATE			A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			NAME		
MAIXU 慈溪市迈旭电子有限公司			MX15EDGRKM-3.81-XXP		
DWGNO.					