
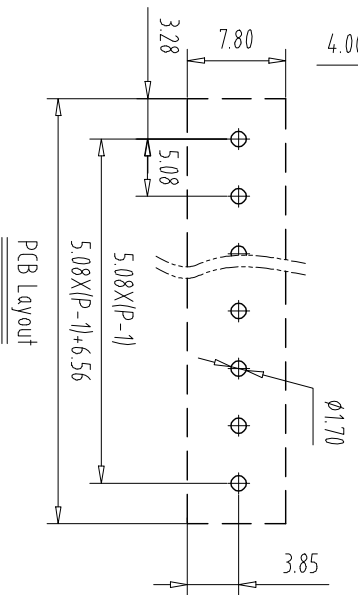
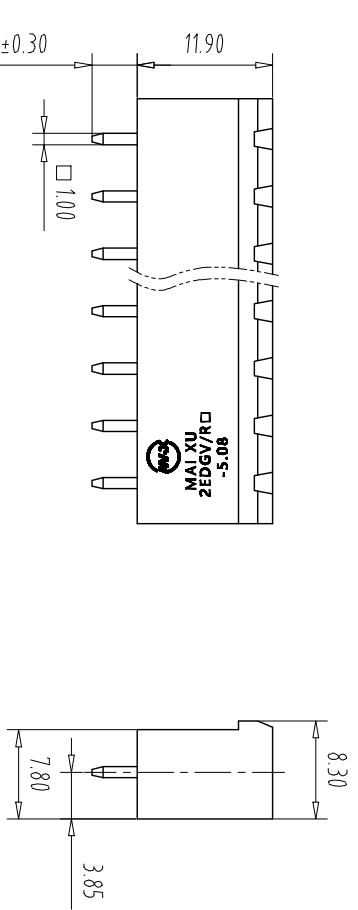


注: 本图只作禁止传输、复制、编辑文档, 以及附具内零件标注

REV	ECN NO.	CONTENT	CHK	DATE

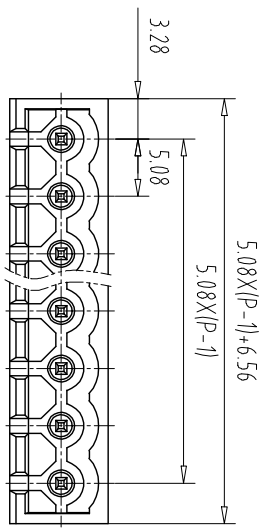


- NOTES1:
- 1. UL Standard
 - 1. Rating voltage/current: 300V/15A
 - 2. withstanding voltage: AC2000V/1Min
- IEC Standard
- | | |
|--------------------------|-------|
| 1. Pollution Degree | 2 |
| Overvoltage Category | III |
| Rate Impulse Voltage(KV) | 4.0KV |
| Rate Voltage(V) | 320V |
| Rate Current(A) | 15A |

- NOTES2:
- 1. Housing: PA66 (UL94V-0)
 - 2. Solder Pin: Brass (Sn Plated)

- NOTES3:
- 1. Pitch: 5.08mm Poles: 02-24P
 - 2. Operating temperature: -40℃~+105℃
 - 3. RoHS Compliance

How to order

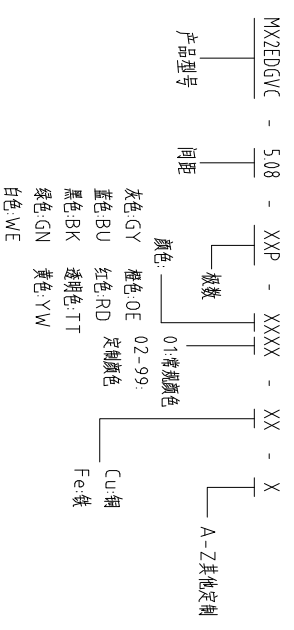

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
±2°	±2°	±2°	±2°	±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	SHEET/OF	1/1
APP.	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MATERIAL	NOTE
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MATERIAL	NOTE
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MATERIAL	NOTE