
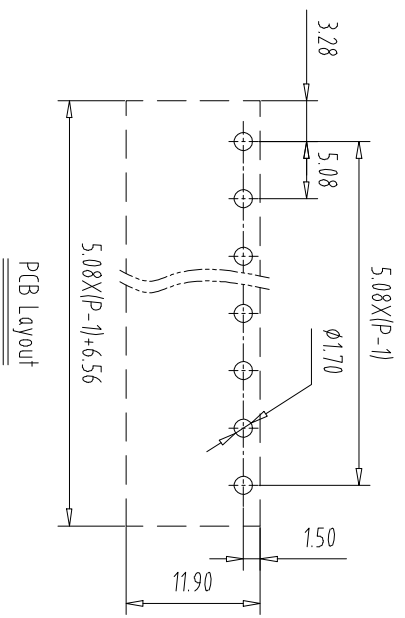
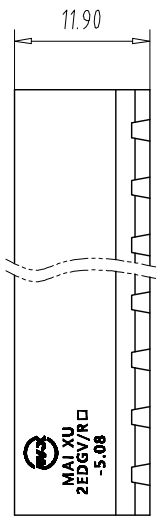


注: 本型产品禁止传输、复制、编辑或修改, 以及用其内容进行复制或

REV	ECN NO.	CONTENT	CHK	DATE

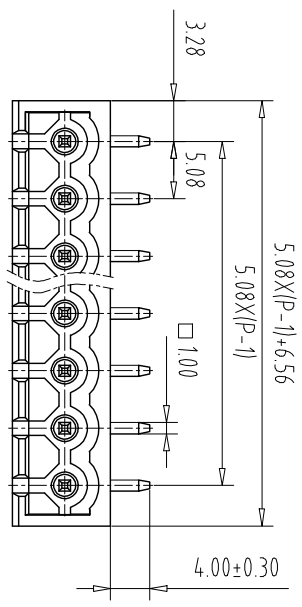


NOTES1:
 UL Standard
 1.Rating voltage/current: 300V/15A
 2.withstanding voltage: AC2000V/1Min
 IEC Standard
 1. Pollution Degree 2
 2. Overvoltage Category III
 Rate Impulse Voltage(KV) 4.0KV
 Rate Voltage(V) 320V
 Rate Current(A) 15A

NOTES2:
 1.Housing: PA66 (UL94V-0)
 2.Solder Pin: Brass (Sn Plated)

NOTES3:
 1.Pitch: 5.08mm Poles: 02-24P
 2.Operating temperature: -40°C~+105°C
 3.RoHS Compliance

How to order

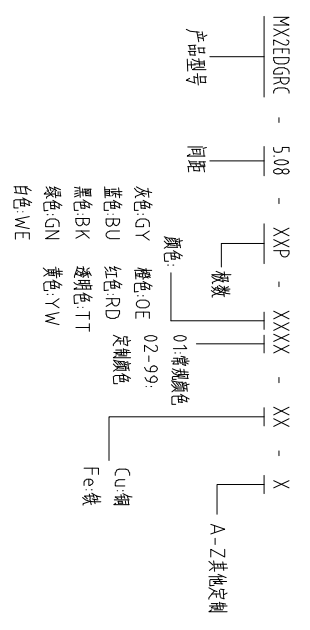

Pitch Range In mm	Nominal Dimension Range In mm						Nominal Dimension Range	
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	UNITS	MM	1/1
CHK	DATE	SCALE	SCALE	1:1	A4
APP.	DATE	NAME	NAME	MX2EDGRC-5.08-XXP	

MAIXU 慈溪市迈旭电子有限公司 DWGNO.