






注: 本资料禁止传输、复制、编辑被控, 以及用其内容建设性交流

REV	ECN NO.	CONTENT	CHK	DATE

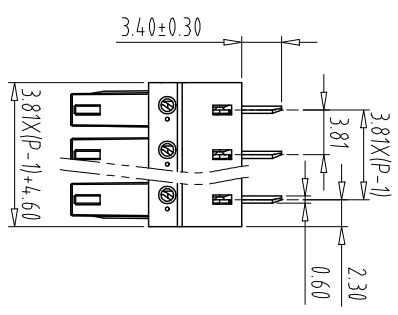

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

NOTES2:
1.Housing: PA66 (UL94V-0)
2.Clamp: Copper alloy (Sn Plated)

NOTES3:
1.Pitch: 3.81mm Poles: 02-24P
2.Stripping length: /
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
MX15EDGB - 381 - XXP - XXXX - X - X
产品型号 间距 颜色: 01常规颜色
灰色:GY 棕色:OE 02-99:
蓝色:BU 红色:RD 定制颜色
黑色:BK 透明色:TT
绿色:GN 黄色:YW
白色:WE
A-Z其他定制
Cu:铜
Fe:铁

Pitch Range In mm	Nominal Dimension Range In mm	Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	SCALE	1:1
APP	DATE	DATE	SCALE	A4	1/1
CI XI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司 MX15EDGB-3.81-XXP					1/1