
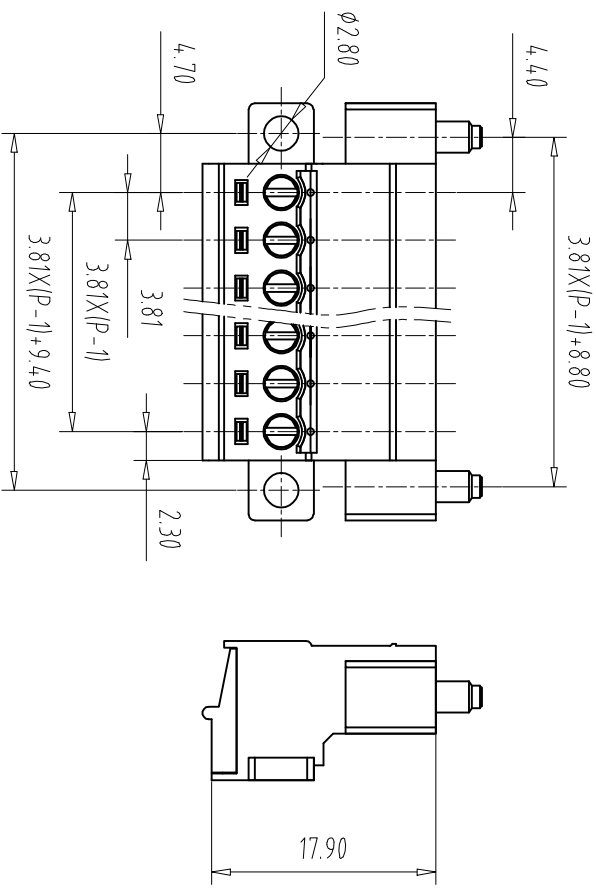


注: 本资料禁止传输、复制、编辑、修改, 以及用其内容进行建设性交流

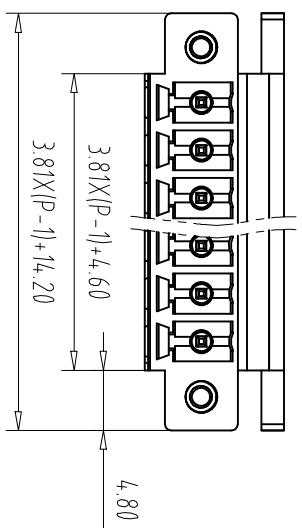

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77Lb.in
3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm
3. wire range: 0.2~1.5mm²

NOTES2:


- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Screw1: Steel (M2.0,Zn Plated)
- 5.Screw2: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKMF - 3.81 - XXP - XXXX - XX - X - X

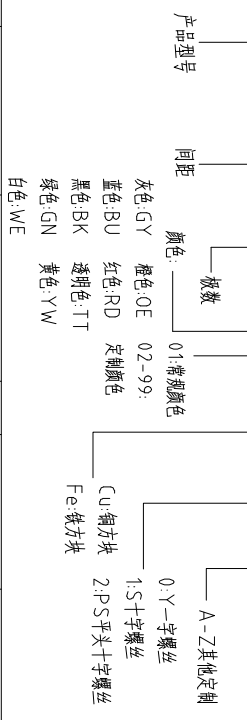

Pitch Range In mm	Nominal Dimension Range In mm				Over 150	0.1/10
	Over 6	Over 10	Over 24	Over 30		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	MM	SHEET/OF
APP	DATE	DATE	1:1	A4	1/1
CXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司			NAME	MX15EDGKMF-3.81-XXP	
			DWGNO.		