
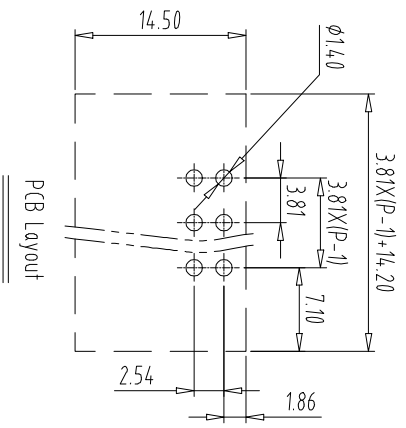

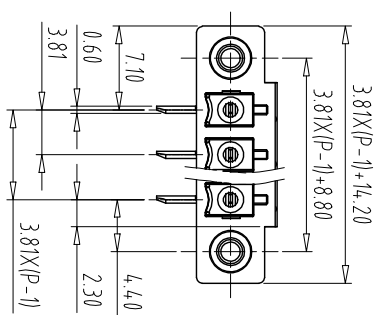



注: 本资料禁止传输、复制、编辑、修改, 以及用其内容建设数据库

REV	ECN NO.	CONTENT	CHK	DATE



NOTES1:
UL Standard


1	Use group	B	C	D
	Rated Current	8A	/	8A
	Rated Voltage	300V	/	300V

IEC Standard

1	Pollution Degree	3	2	2
	Overvoltage Category	III	III	II
	Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
	Rate Voltage(V)	160V	160V	320V
	Rate Current(A)	8A	8A	8A

- NOTES2:
- Housing: PA66 (UL94V-0)
 - Clamp: Copper alloy (Sn Plated)
 - Nut: Brass

- NOTES3:
- Pitch: 3.81mm Poles: 02-24P
 - Stripping length: /
 - Operating temperature: -40°C~+105°C
 - RoHS Compliance

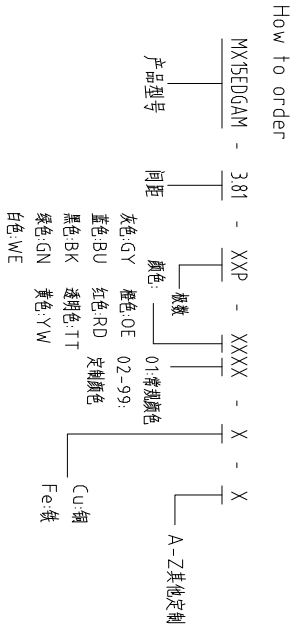

Pitch Range In mm	Nominal Dimension Range In mm					
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	SCALE	SHEET/OF
APP	DATE	DATE	DATE	1:1	A4
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司				NAME	MX15EDGAM-381-XXP
				DWGNO.	