

注: 本资料禁止传输、复制、编辑被控, 以及用其内容建设性交流

REV	ECN NO.	CONTENT	CHK	DATE






NOTES1:

UL Standard

1	Use group	B	C	D
	Rated Current	8A	/	8A
	Rated Voltage	300V	/	300V

IEC Standard

1	Pollution Degree	3	2	2
	Overvoltage Category	III	III	II
	Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
	Rate Voltage(V)	160V	160V	320V
	Rate Current(A)	8A	8A	8A

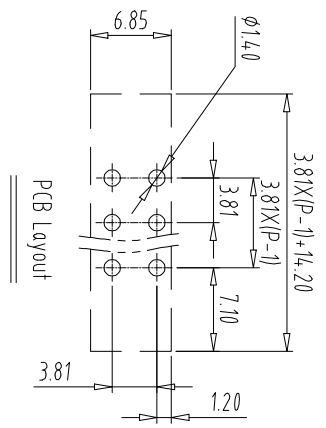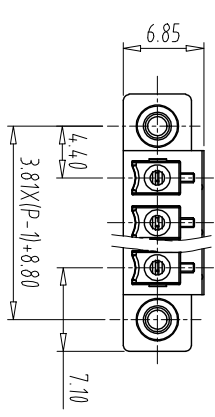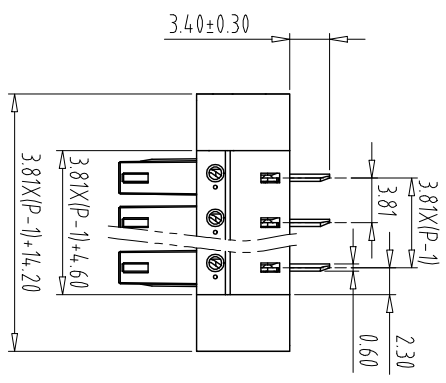


Pitch Range In mm

Over 6	Over 10	Over 10	Over 30	Over 60	Over 60	Over 100	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 100	TO 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

Nominal Dimension Range In mm

Over 6	Over 10	Over 10	Over 30	Over 60	Over 60	Over 100	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 100	TO 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

How to order

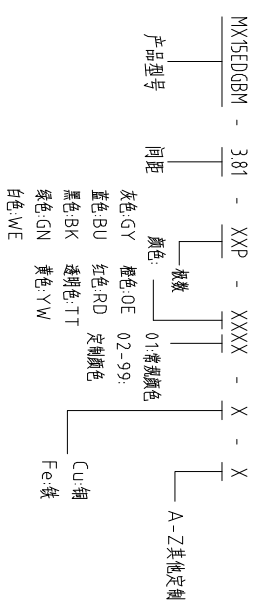

- NOTES2:
- 1.Housing: PA66 (UL94V-0)
  - 2.Clamp: Copper alloy (Sn Plated)
  - 3.Nut: Brass
- NOTES3:
- 1.Pitch: 3.81mm Poles: 02-24P
  - 2.Stripping length: /
  - 3.Operating temperature: -40°C~+105°C
  - 4.RoHS Compliance

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	MM	SHEET/OF
APP	DATE		1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX15EDGBM-381-XXP		
慈溪市迈旭电子有限公司			DWGNO.		