
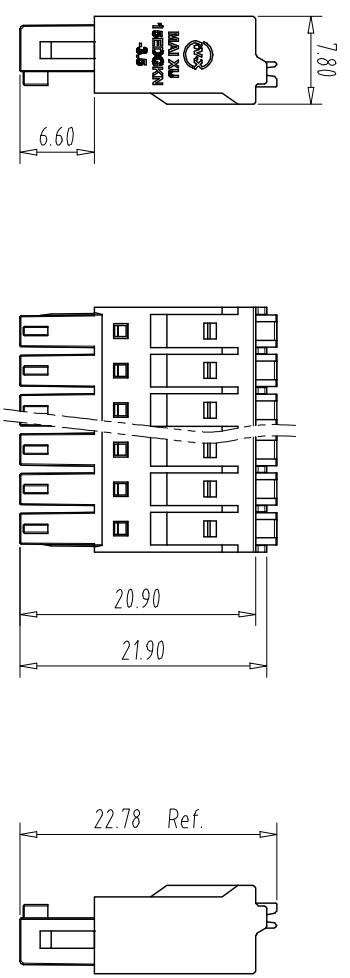


注: 本图只作禁止传输、复制、编辑、打印、以及用其内容进行建模



REV	ECN NO.	CONTENT	CHK	DATE

NOTES:  
UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

1. Wire range: 24~16AWG  
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.5mm<sup>2</sup>


NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 9-10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

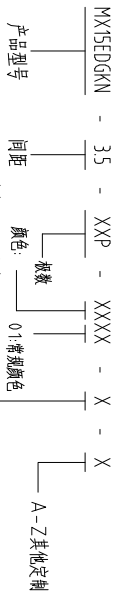

Pitch	Range	In	Nominal	Dimension	Range	
mm	Over	In	mm	Over	Over	0.1/10
	6	10	30	60	100	±2°
TO	TO	TO	TO	TO	TO	
	6	10	24	30	60	±2°
TO	TO	TO	TO	TO	TO	
	±0.15	±0.20	±0.30	±0.30	±0.50	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	24.07.25	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME	MX15EDGKN-35-XXP		

**MAIXU** 慈溪市迈旭电子有限公司  
 CXI MAIXU ELECTRONICS CO.,LTD.  
 DWGNO.