

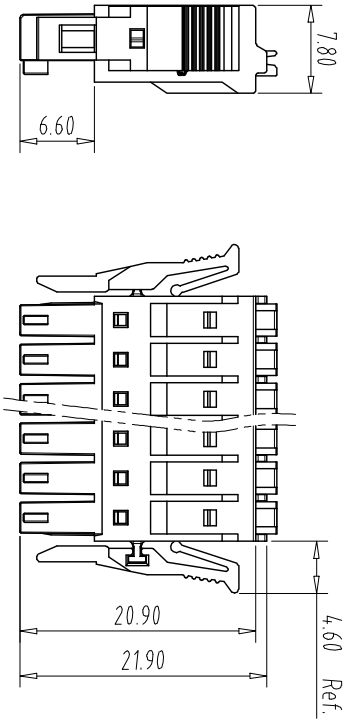


注: 本型为深基绝缘、复绕、端接式, 以及附具的深基绝缘

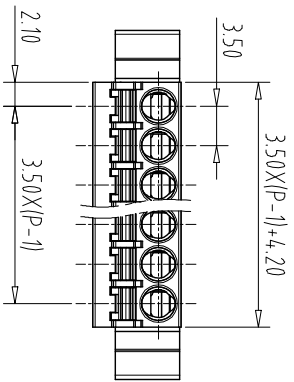

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:  
UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

1. Use group  
2. Wire range: 24~16AWG  
IEC Standard


1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

NOTES2:  
2. wire range: 0.2~1.5mm<sup>2</sup>

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel
- 6.Pendant: PA66 (UL94V-0)

NOTES3:  
1.Pitch: 3.5mm Poles: 02-24P  
2.Stripping length: 9-10mm  
3.Operating temperature: -40℃~+105℃  
4.RoHS Compliance

How to order

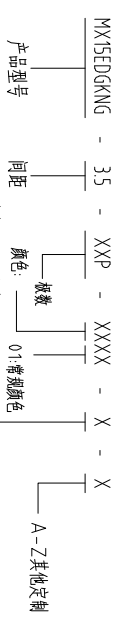

Pitch Range In mm	Nominal Dimension Range In mm						Nominal Dimension Range	
	Over	In	Over	In	Over	In	Over	In
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	0.1/10	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	24.07.25	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME	MX15EDGKNG-3.5-XXP		

MAIXU 慈溪市迈旭电子有限公司 DWGNO.