

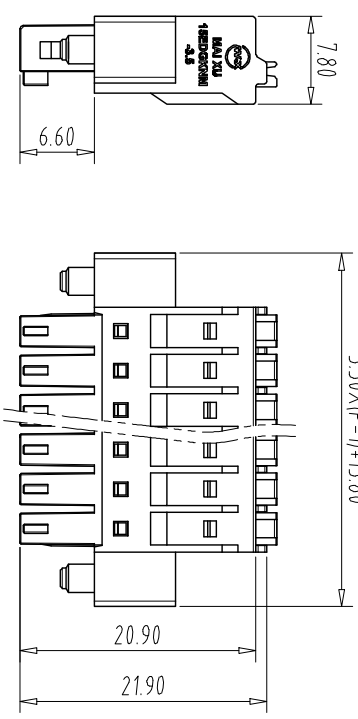


注: 本图仅供参考, 复制、翻印、修改, 以及用其内容进行设计

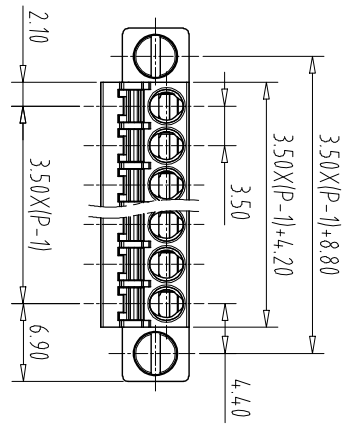

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:  
UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

NOTES2:  
IEC Standard  
2. Wire range: 24~16AWG


1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

NOTES2:  
2. wire range: 0.2~1.5mm<sup>2</sup>

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel
- 6.Screw: Steel (M2.5,Zn Plated)

NOTES3:  
1.Pitch: 3.5mm Poles: 02-24P  
2.Stripping length: 9-10mm  
3.Operating temperature: -40℃~+105℃  
4.RoHS Compliance

How to order

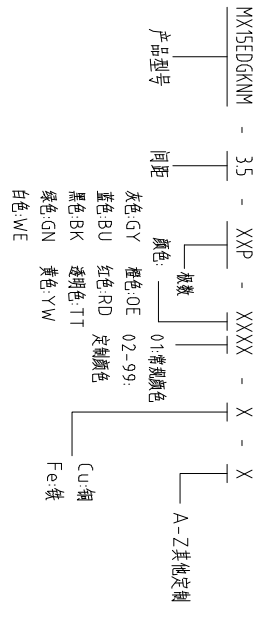

Pitch Range In mm	Nominal Dimension Range In mm					
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150 TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	SCALE	1:1
APP	DATE	SCALE	1:1	A4	1/1
NAME		MX15EDGKNM-35-XXP			

24.07.25

SCALE: 1:1

NAME: MX15EDGKNM-35-XXP

DATE: 24.07.25

SCALE: 1:1

NAME: MX15EDGKNM-35-XXP

MAIXU MAIXU ELECTRONICS CO.,LTD.  
慈溪市迈旭电子有限公司