
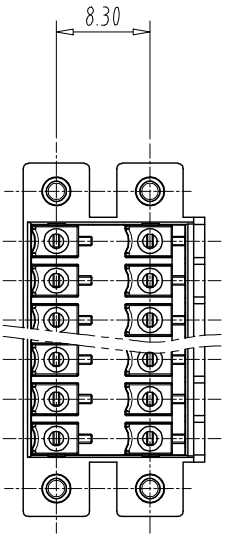

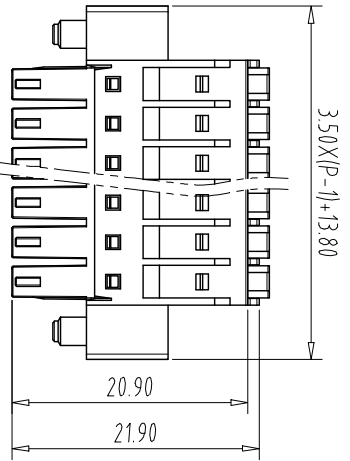



注: 本图只作基本传输、复制、编辑使用, 以及制作母板使用

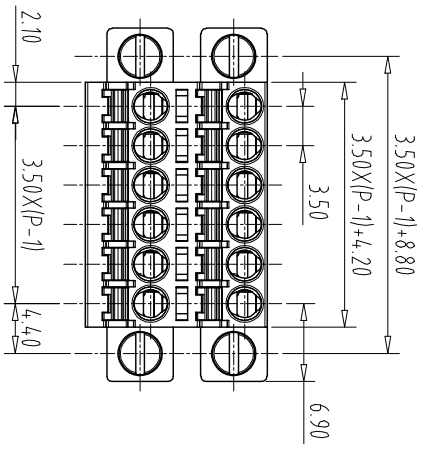

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Wire range: 24~16AWG


IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

NOTES2:

2. wire range: 0.2~1.5mm²

- NOTES3:
- 1.Housing: PA66 (UL94V-0)
 - 2.Cover: PA66 (UL94V-0)
 - 3.Button: POM
 - 4.Conductor: Copper alloy (Sn Plated)
 - 5.Spring: Stainless Steel
 - 6.Screw: Steel (M2.5,Zn Plated)
- How to order
- MX15EDGKMM-B - 35 - 2XXXP - XXXX - X - X

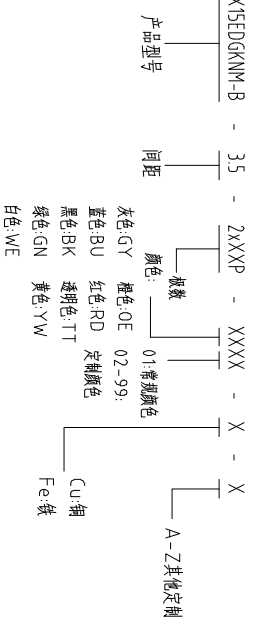

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6 TO	Over 10 TO	Over 30 TO
Over 10 TO	Over 24 TO	Over 60 TO
Over 30 TO	Over 60 TO	Over 100 TO
Over 60 TO	Over 100 TO	Over 150 TO
±0.15	±0.20	±0.30
±0.30	±0.30	±0.50
±0.50	±0.70	±1.00
±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	24.07.25	UNITS	MM
CHK	DATE		SCALE	1:1	A4
APP	DATE		NAME	MX15EDGKMM-B-35-2XXXP	

公司名称: CIXI MAIXU ELECTRONICS CO.,LTD.
 地址: 慈溪市迈旭电子有限公司
 文件号: DWGNO.