

注：本图禁止传输、复制、编辑、修改，以及用其内容建立新图

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1.	Use group	B	C	D
	Rated Current	8A	/	8A
	Rated Voltage	300V	/	300V

2. Wire range: 24~16AWG

IEC Standard

1.	Pollution Degree	3	2	2
	Overvoltage Category	III	III	II
	Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
	Rate Impulse Voltage(V)	160V	160V	320V
	Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.5mm²

NOTES2:



- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel
- 6.Pendant: PA66 (UL94V-0)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Stripping length: 9-10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKNG-B - 3.5 - 2XXXXP - XXXX - X - X

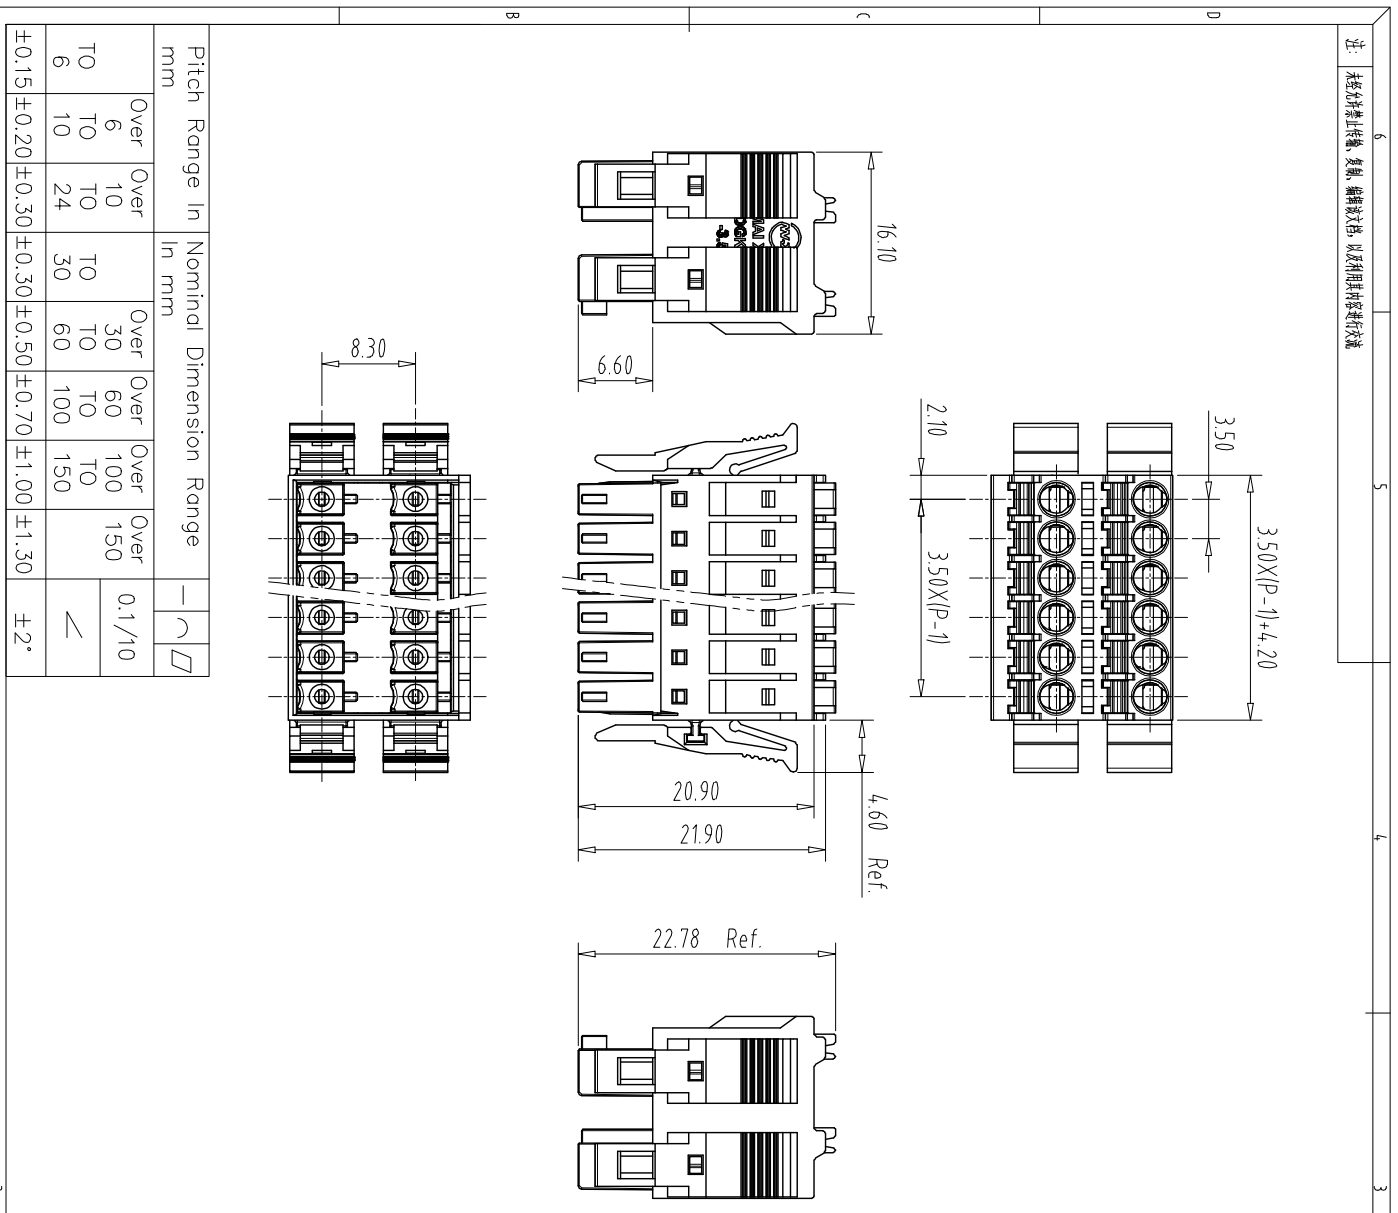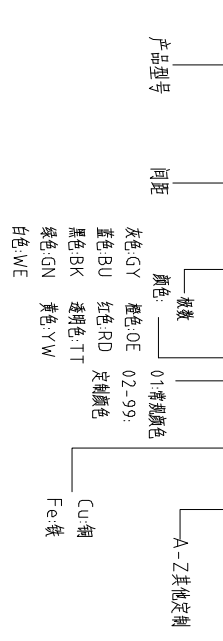

Pitch Range In mm	Nominal Dimension In mm	Over	In mm	Over	Nominal Dimension Range	Over	150	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	24.07.25	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME			

NAME: MX15EDGKNG-B-3.5-2XXXXP

MAIXU 慈溪市迈旭电子有限公司
DWGNO.