

注: 本图仅供参考, 复制、翻印、修改、以及用其内容者均须征得本公司同意。

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:
UL Standard

Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	150V	50V	150V

1. Wire range: 24~16AWG
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.5mm²

NOTES2:



- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)p
- 2.Stripping length: 9-10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKNH - 35 - 2xXXP - XXXX - X - X

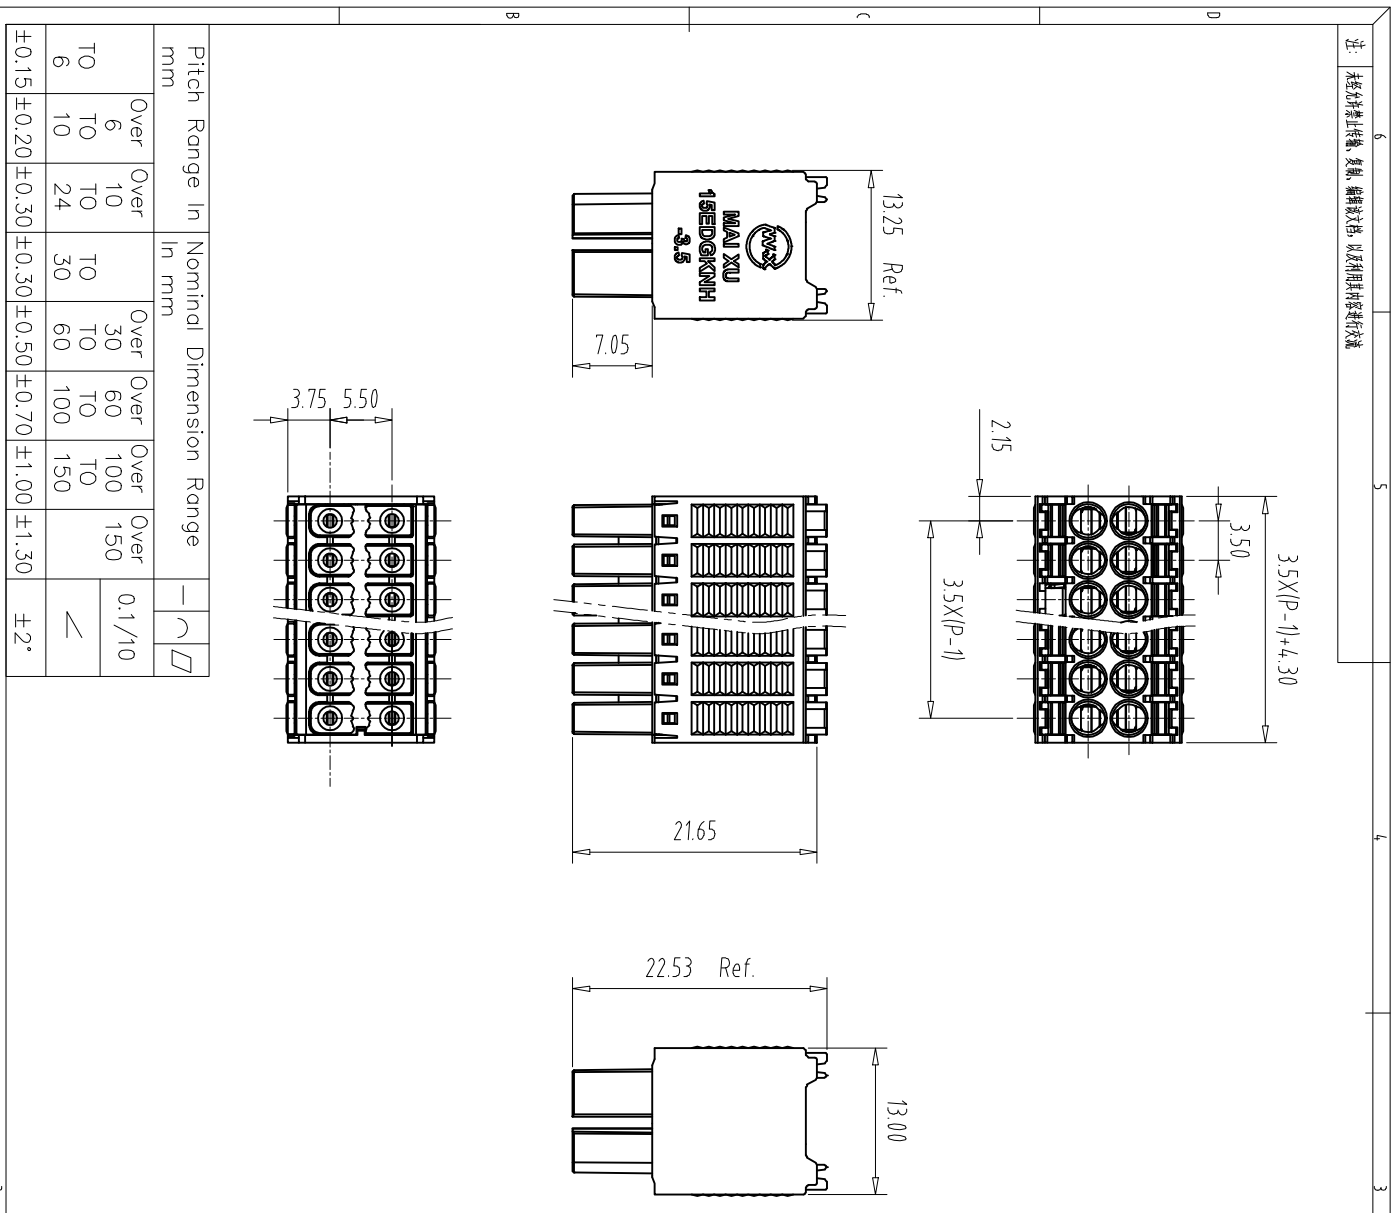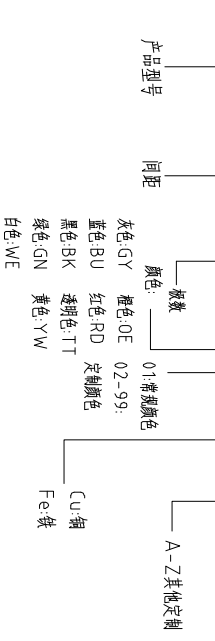

Pitch Range In mm	Nominal Dimension Range In mm
Over 6 TO 10	Over 10 TO 24
Over 30 TO 60	Over 30 TO 60
Over 60 TO 100	Over 60 TO 100
Over 100 TO 150	Over 100 TO 150
Over 150 TO 150	Over 150 TO 150

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX15EDGKNH-35-2xXXP		
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		