
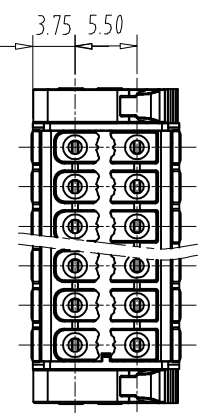
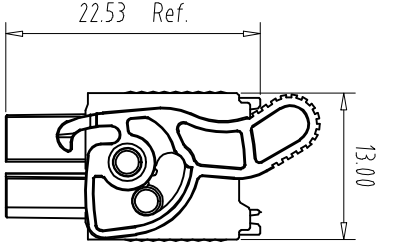
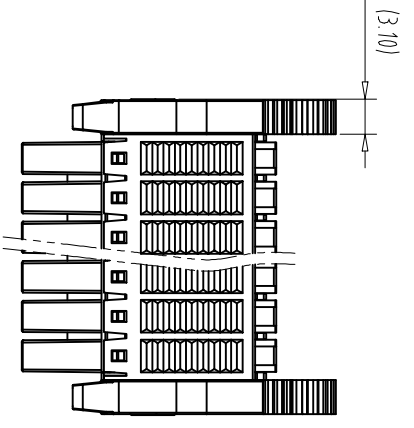
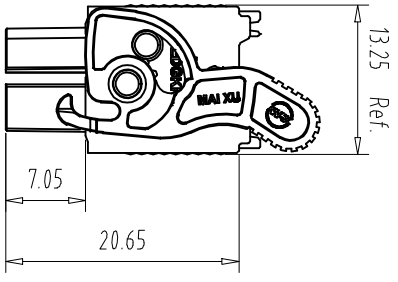


注: 本图仅供参考, 复制、翻印、扫描、以及用其进行设计均须征得本公司同意。

REV	ECN NO.	CONTENT	CHK	DATE

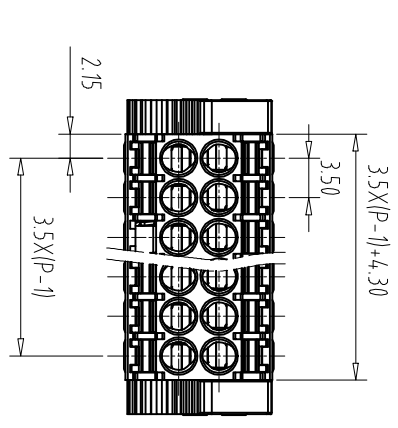

NOTES:

UL Standard

1	Use group	B	C	D
	Rated Current	8A	8A	8A
	Rated Voltage	150V	50V	150V

2. Wire range: 24~16AWG
IEC Standard

1.	Pollution Degree	3	2	2
	Overvoltage Category	III	II	II
	Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
	Rate Voltage(V)	160V	160V	250V
	Rate Current(A)	8A	8A	8A


NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel
- 6.Lever: POM

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Stripping length: 9-10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

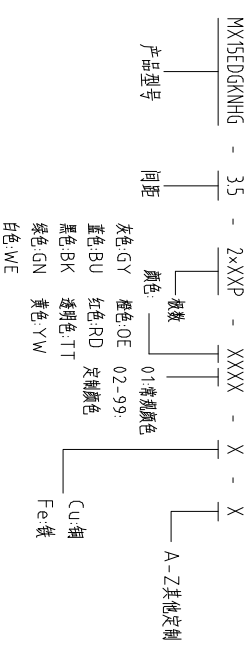

Pitch Range In mm	Nominal Dimension Range In mm						Nominal Dimension Range
	Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	SHEET/OF	1/1
APP.	DATE		1:1	A4	
CIXI MAIXU ELECTRONICS CO.,LTD.					
慈溪市迈旭电子有限公司					
MX15EDGKNHG-3.5-2xXXP					
DWGNO.					