
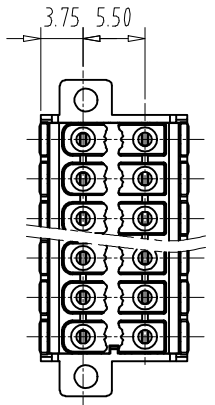
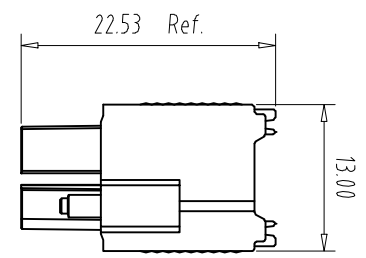
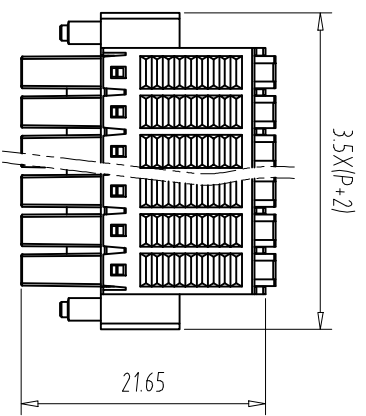
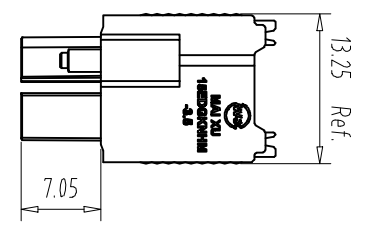


注: 本资料禁止传输、复制、编辑被控, 以及用其内容建设数据库

REV	ECN NO.	CONTENT	CHK	DATE

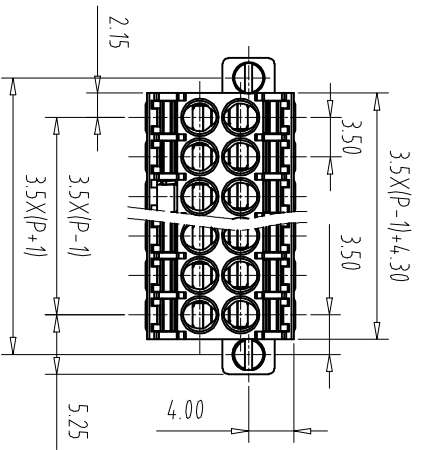

NOTES:

UL Standard

Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	150V	50V	150V

1. Wire range: 24~16AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(kV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.5mm²


NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Spring: Stainless Steel
- 6.Screw: Steel (M2,Zn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Stripping length: 9-10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

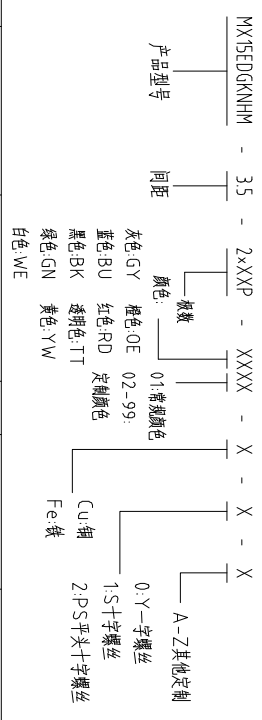

Pitch Range In mm

Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	Over 150	Over 150	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150	≤

Nominal Dimension Range In mm

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°
-------	-------	-------	-------	-------	-------	-------	-------	-----

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	MM	SHEET/OF
APP	DATE	DATE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司					NAME
MX15EDGKNHM-35-2xXXP					DWGNO.