
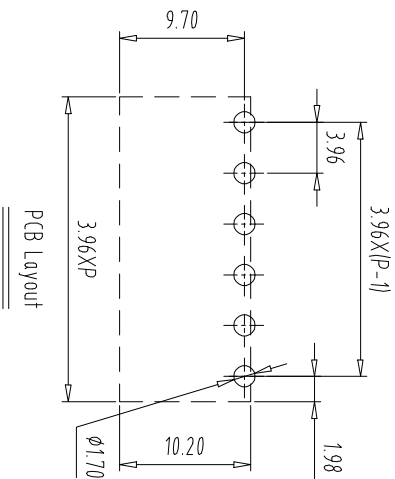

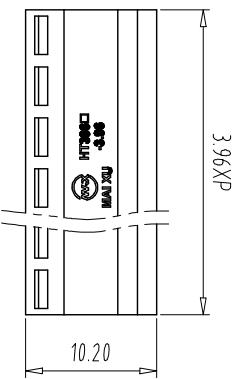


注：本图仅供参考，复制、编辑文档，以及印刷时请谨慎交流

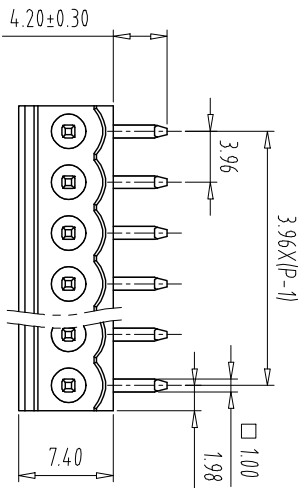

REV	E.C.N NO.	CONTENT	CHK	DATE
-----	-----------	---------	-----	------

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	10A
Rated Voltage	300V	/	300V

2. withstanding voltage: AC1600V/1Min

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	10A	10A	10A

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Solder Pin: Brass (Sn Plated)

NOTES3:

1.Pitch: 3.96mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

HT396R - 396 - XXP - XXXX - XX - X

产品型号 间距 极数 颜色: 01:常規顏色 02-99: A-Z其他定制

灰色 GY 蓝色 BU 红色 RD 黑色 BK 绿色 GN 白色 WE

Cu 铜 Fe 铁

Pitch Range In mm	Nominal Dimension Range In mm	—	□
Over 6 TO 10 TO 24 TO 30 TO 60 TO 100 TO 150	Over 30 TO 60 TO 100 TO 150	0.1/10	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.09.05	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	HT396R-3.96-XXP		



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司

DWGNO.