

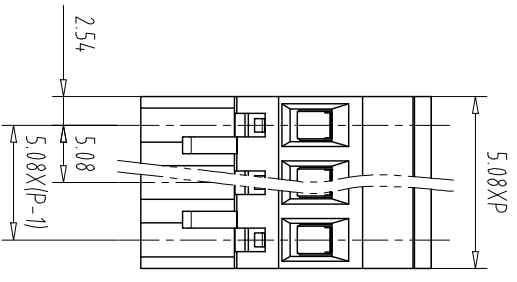
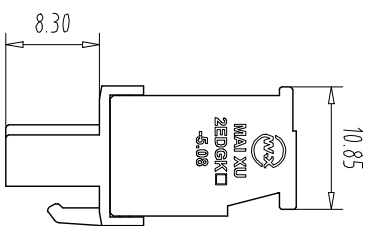


注: 本资料禁止传输、复制、编辑或存档, 以及用其内容进行交流



REV	ECIN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1.	Use group	B	C	D
	Rated Current	15A	/	10A
	Rated Voltage	300V	/	300V

NOTES2:
IEC Standard

1.	Overvoltage Degree	3	2	2
	Overvoltage Category	III	III	II
	Rate Impulse Voltage(KV)	/	4.0KV	/
	Rate Voltage(V)	/	320V	/
	Rate Current(A)	/	15A	/

NOTES3:
1. Torque value: M2.5, 0.4Nm
2. Wire range: 0.2~2.5mm²

NOTES4:
1.Housing: PA66 (UL94V-0)
2.Cover: PA66 (UL94V-0)
3.Cage: Brass (Ni Plated)
4.Clamp: Copper alloy (Ni Plated)
5.Screw: Steel (M2.5,Zn Plated)

NOTES5:
1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 7-8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
MXZEDGKA - 5.08 - XXP - XXXX - XX - X - X

产品型号: 间距: 颜色: 数量:

灰色:GY 棕色:OE 0.1:带颜色
蓝色:BU 红色:RD 02-99:
黑色:BN 透明色:TT 定制颜色
绿色:GN 黄色:YW 白色:WE

Cu铜方块
Fe铁方块
A-Z其他定制
0-Y一字螺丝
1-S十字螺丝
2-PS平头十字螺丝

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
				±0.70	±1.00
				±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MXZEDGKA-5.08-XXP		
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		