

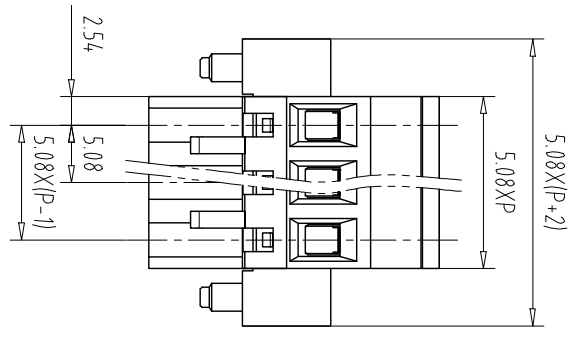
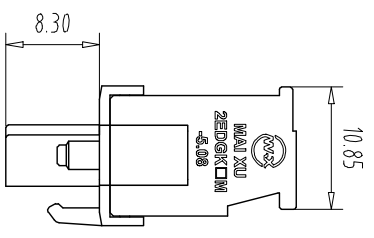


注: 本资料禁止传输、复制、编辑被控文件, 以及用其内容进行建设性交流

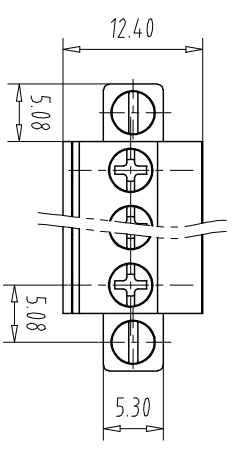

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:
UL Standard

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

- Torque value: M2.5, 3.5, 4Lb.in
- Wire range: 28~12AWG


IEC Standard	1	2	2
Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	15A	/

- Torque value: M2.5, 0.4Nm
- Wire range: 0.2~2.5mm²

- NOTES:
- Housing: PA66 (UL94V-0)
 - Cover: PA66 (UL94V-0)
 - Cage: Brass (Ni Plated)
 - Clamp: Copper alloy (Ni Plated)
 - Screw: Steel (M2.5, Zn Plated)

- NOTES3:
- Pitch: 5.08mm Poles: 02-24P
 - Stripping length: 7-8mm
 - Operating temperature: -40℃~+105℃
 - RoHS Compliance

How to order
MX2EDGKAM - 508 - XXP - XXXX - XX - X - X

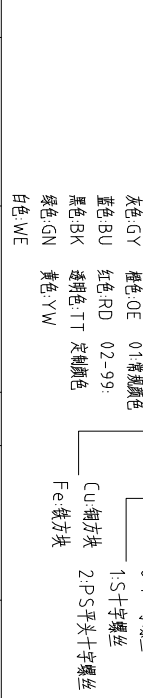

Pitch Range In mm	Nominal Dimension Range In mm					Tolerance
	Over	TO	Over	TO	Over	
6	6	10	24	30	60	±0.15
TO	TO	TO	TO	TO	TO	±0.20
10	10	24	30	60	100	±0.30
TO	TO	TO	TO	TO	TO	±0.30
150	150	150	150	150	150	±0.50
TO	TO	TO	TO	TO	TO	±0.70
1.00	1.00	1.00	1.00	1.00	1.00	±1.00
TO	TO	TO	TO	TO	TO	±1.30
±2°	±2°	±2°	±2°	±2°	±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	MM	SHEET/OF
APP.	DATE	DATE	1:1	A4	1/1
CXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈地电子有限公司					NAME
					MX2EDGKAM-5.08-XXP
					DWGNO.