
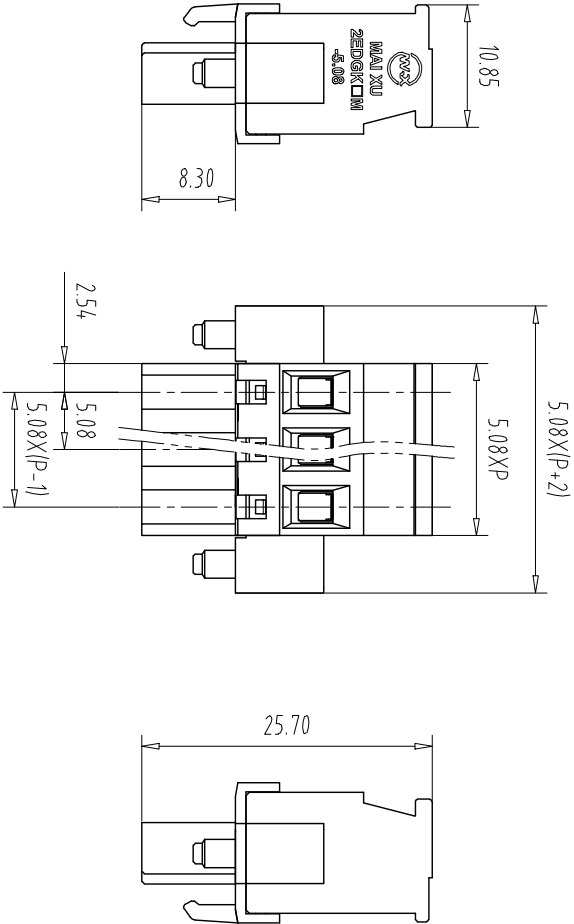


注: 本型产品禁止传输、复制、编辑被控文件, 以及用其内容进行交流

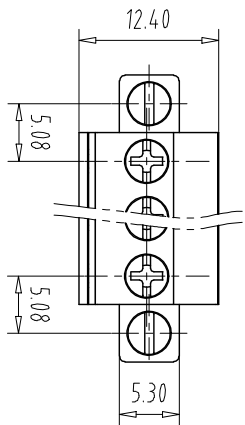

REV	ECN NO.	CONTENT	CHK	DATE

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V


- NOTES1:
UL Standard
1. Use group: B, C, D
 2. Rated Current: 15A, 10A
 3. Rated Voltage: 300V, 300V
 3. Torque value: M2.5, 3.54Lb/in
 4. Wire range: 28~12AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	15A	/

2. Torque value: M2.5, 0.4Nm
 3. wire range: 0.2~2.5mm²
- NOTES2:
1. Housing: PA66 (UL94V-0)
2. Cover: PA66 (UL94V-0)
3. Cage: Brass (Ni Plated)
4. Clamp: Copper alloy (Ni Plated)
5. Screw: Steel (M2.5, Zn Plated)

- NOTES3:
1. Pitch: 5.08mm Poles: 02-24P
2. Stripping length: 7-8mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order

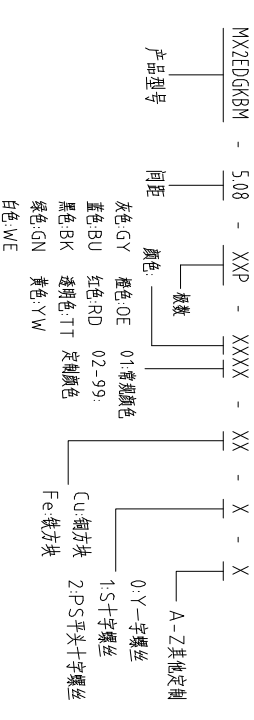

Pitch Range In mm	Nominal Dimension Range In mm					Nominal Dimension Range
	Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO
0.1/10						±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	UNITS	MM	SHEET/OF
APP.	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.					NAME
MAIXU 慈溪市迈旭电子有限公司					MX2EDGKBM-5.08-XXP
DWGNO.					